


屋内照明器具特性




品名	DD-3673-WW		
光源	LED13.5W		
実効光束 (器具光束)	1,206 lm	効率	89.3 lm/W



配光曲線図

実光度

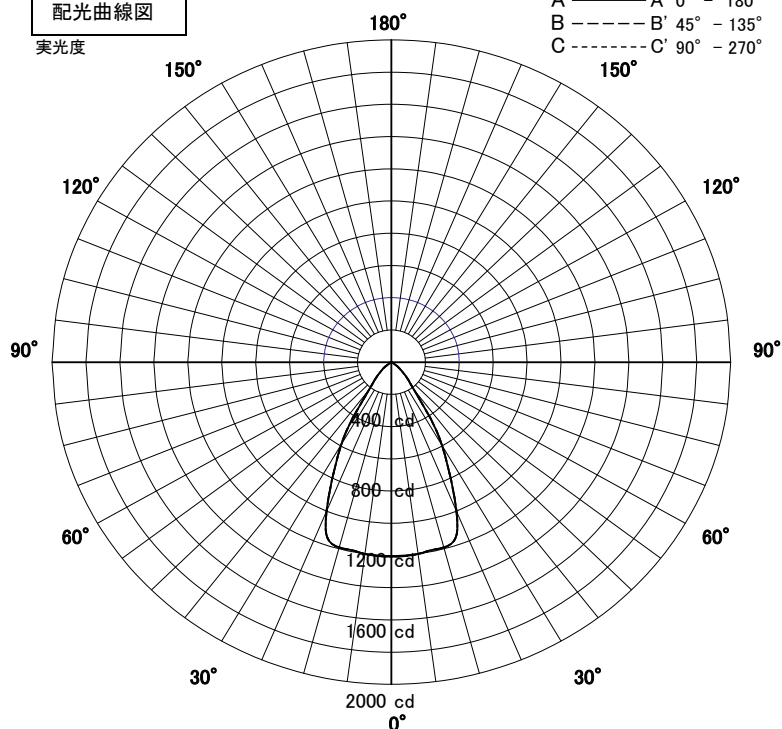


直射水平面照度

単位: Lx

A-A' Section

C-C' Section

色温度	3500K	
演色評価指数	Ra94	
保守率	良	0.67
	中	0.63
	否	0.56
1/2照度角		
A-A'	53.0	Deg
C-C'	53.0	Deg
最大取付間隔		
A-A'	1.00	H
C-C'	1.00	H

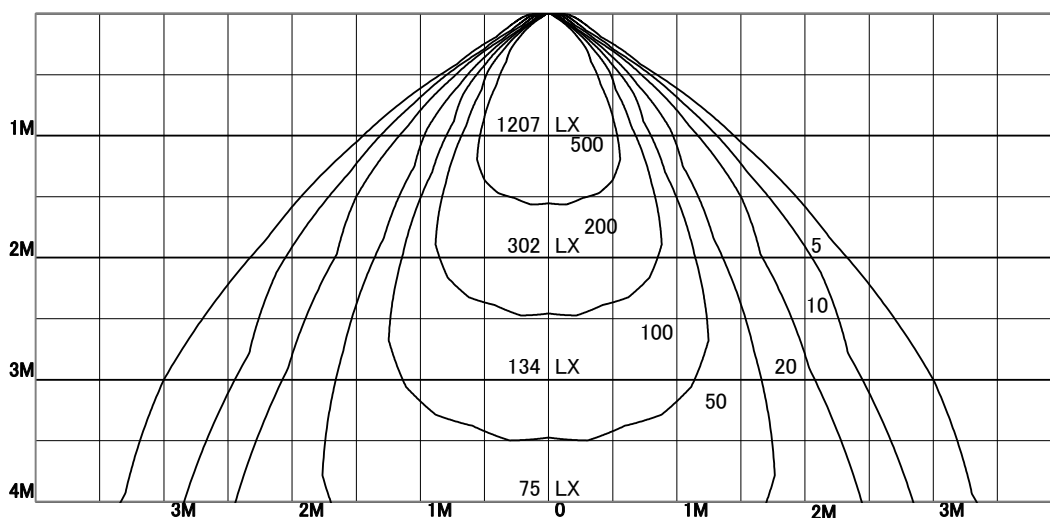

照 明 率 表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	82148	75301	70924	67885	81359	74931	70749	67811	79892	74221	70405	67663	78557	73550	70072	67516	66349
0.80	88070	81715	77375	74223	87147	81226	77114	74093	85432	80291	76606	73835	83869	79408	76113	73581	72268
1.00	92785	87198	83189	80173	91808	86629	82855	79984	89986	85540	82204	79609	88321	84512	81575	79240	77839
1.25	96445	91593	87947	85108	95422	90944	87532	84846	93509	89702	86724	84331	91755	88529	85943	83824	82307
1.50	98921	94666	91356	88707	97872	93956	90872	88380	95903	92597	89930	87734	94090	91313	89022	87101	85479
2.00	102549	99372	96779	94621	101500	98591	96192	94178	99521	97093	95051	93308	97687	95676	93952	92458	90687
2.50	104678	102231	100166	98402	103634	101402	99503	97868	101657	99811	98215	96820	99816	98304	96975	95798	93900
3.00	106100	104187	102535	101095	105063	103325	101814	100487	103094	101670	100414	99297	101253	100099	99067	98138	96138
4.00	107426	106047	104820	103721	106373	105128	104012	103007	104367	103357	102443	101610	102482	101674	100935	100256	98068
5.00	108164	107108	106150	105276	107100	106149	105282	104487	105065	104301	103598	102948	103146	102542	101981	101458	99135
7.00	109050	108406	107807	107249	107975	107401	106865	106364	105913	105462	105038	104639	103961	103613	103285	102973	100480
10.00	109584	109209	108851	108517	108492	108163	107849	107551	106393	106142	105902	105672	104398	104212	104033	103861	101212