



屋内照明器具特性



品名	LD-2940-L		
光源	LDA7L-H/60W		
実効光束 (器具光束)	607lm	効率	86.7lm/W



配光曲線図
実光度

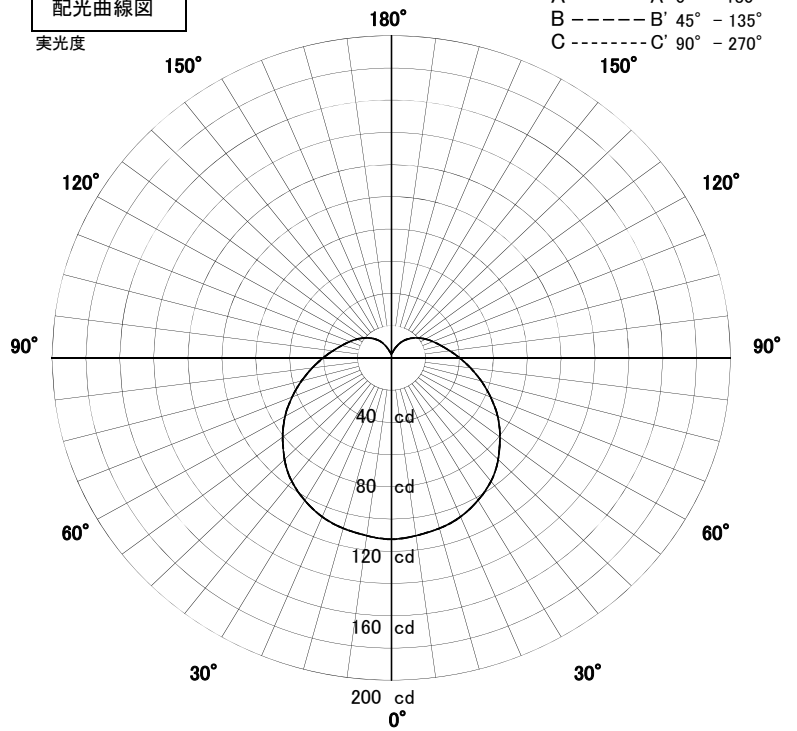


直射水平面照度

単位: Lx

A-A' Section

C-C' Section

色温度	2700K	
演色評価指数	Ra83	
保守率	良	0.80
	中	0.60
	否	0.5
1/2照度角		
A-A'	68.0	Deg
C-C'	68.0	Deg
最大取付間隔		
A-A'	1.35	H
C-C'	1.35	H

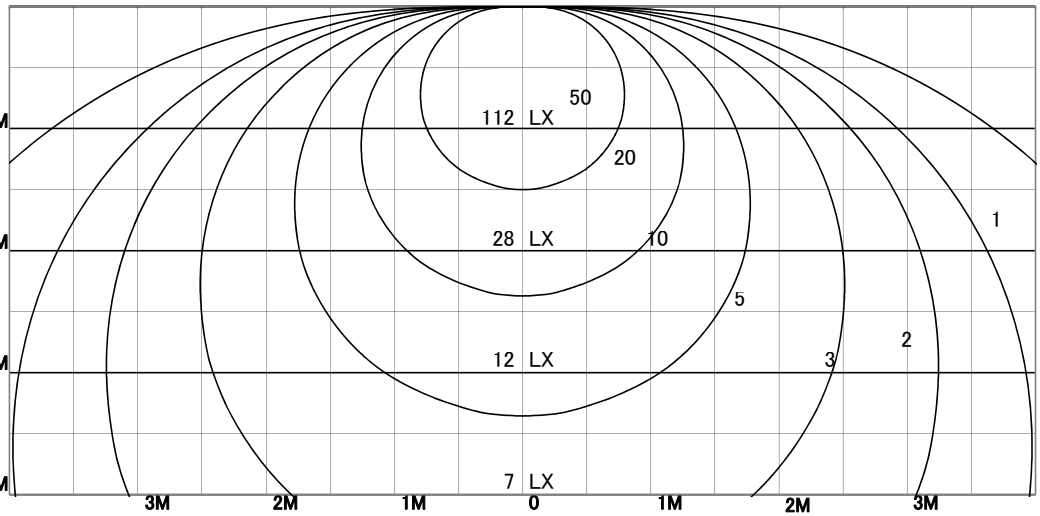

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁																	
床																	
0.60	30	22	17	14	29	22	17	14	28	21	17	14	26	21	17	14	13
0.80	35	27	22	18	34	27	22	18	32	26	21	18	30	25	21	18	17
1.00	38	31	26	22	37	31	26	22	35	30	25	22	34	29	25	22	20
1.25	42	35	30	26	41	34	30	26	39	33	29	26	37	32	28	25	24
1.50	44	38	33	29	43	37	33	29	41	36	32	29	39	35	31	28	27
2.00	48	42	38	34	47	42	38	34	45	40	37	34	43	39	36	33	32
2.50	50	45	41	38	49	45	41	38	47	43	40	37	45	42	39	37	35
3.00	52	48	44	41	51	47	43	40	49	45	42	40	47	44	41	39	38
4.00	54	50	47	44	53	50	47	44	51	48	46	43	49	47	45	43	41
5.00	55	52	49	47	54	51	49	46	52	50	48	46	51	49	47	45	43
7.00	57	54	52	50	56	54	52	50	54	52	50	49	52	51	49	48	46
10.00	58	56	55	53	57	56	54	52	56	54	53	51	54	53	52	50	49