



屋内照明器具特性

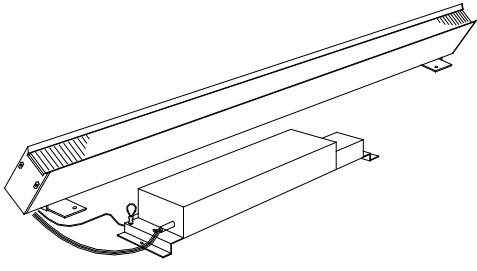

品名	LD-2955-L		
光源	LED 29W × 1		
実効光束 (器具光束)	1484lm	効率	51.2lm/W

配光曲線図
実光度

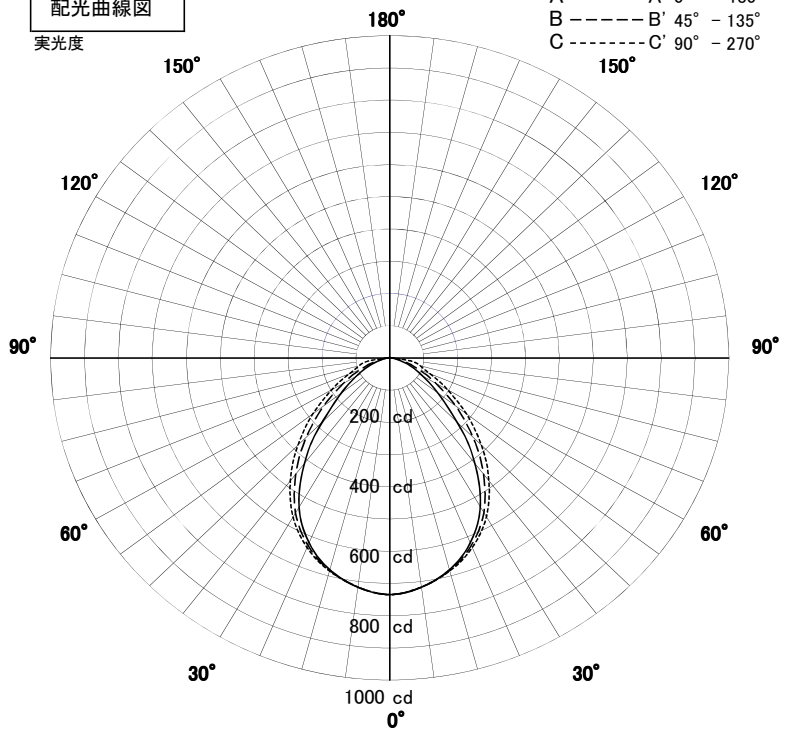


直射水平面照度

単位: Lx

A-A' Section

C-C' Section

色温度	3000K	
演色評価指数	Ra80	
保守率	良	0.80
	中	0.60
	否	0.5
1/2照度角		
A-A'	58.0	Deg
C-C'	60.5	Deg
最大取付間隔		
A-A'	1.11	H
C-C'	1.17	H

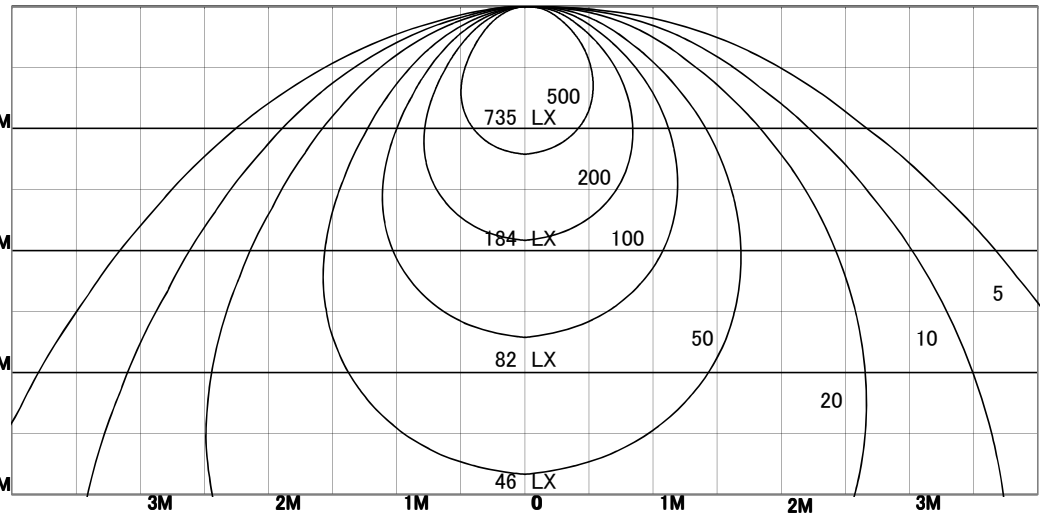

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	42	35	30	27	41	35	30	27	40	34	30	27	39	33	30	27	26
0.80	48	41	36	33	47	41	36	33	45	40	36	33	44	39	35	33	31
1.00	52	46	42	38	51	45	41	38	49	44	41	38	48	44	40	38	36
1.25	56	50	46	43	55	50	46	43	53	49	45	43	51	48	45	42	41
1.50	58	53	50	47	57	53	49	46	56	52	49	46	54	51	48	46	44
2.00	62	58	55	52	61	57	54	52	59	56	54	51	58	55	53	51	49
2.50	64	61	58	56	63	60	58	55	61	59	57	55	60	58	56	54	53
3.00	66	63	60	58	65	62	60	58	63	61	59	57	61	60	58	57	55
4.00	67	65	63	61	66	64	63	61	65	63	61	60	63	62	60	59	58
5.00	68	66	65	63	67	66	64	63	66	64	63	62	64	63	62	61	59
7.00	69	68	67	66	68	67	66	65	67	66	65	64	65	64	64	63	61
10.00	70	69	68	67	69	68	67	67	68	67	66	66	66	65	65	64	62