


屋内照明器具特性




品名	LD-2979		
光源	LED55W		
実効光束 (器具光束)	4805lm	効率	87.4lm/W

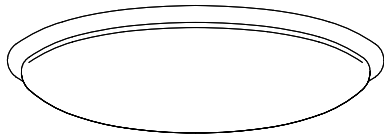

配光曲線図

実光度

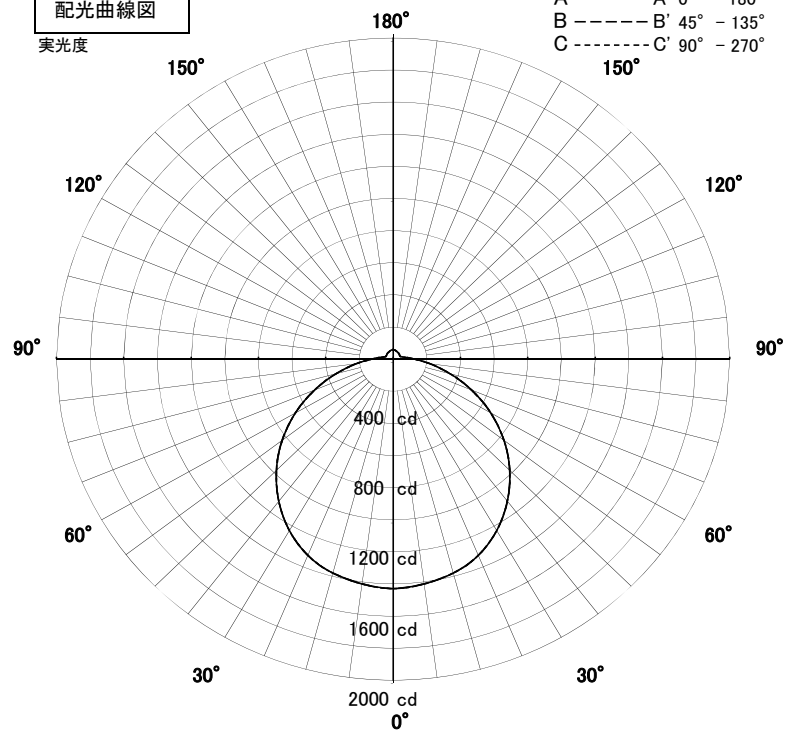


1/2照度角

直射水平面照度

単位:Lx

色温度	6500~2700K	
演色評価指数	Ra83	
保守率	良	0.8
	中	0.6
	否	0.54

1/2照度角		
A-A'	65.0	Deg
C-C'	65.0	Deg
最大取付間隔		
A-A'	1.27	H
C-C'	1.27	H

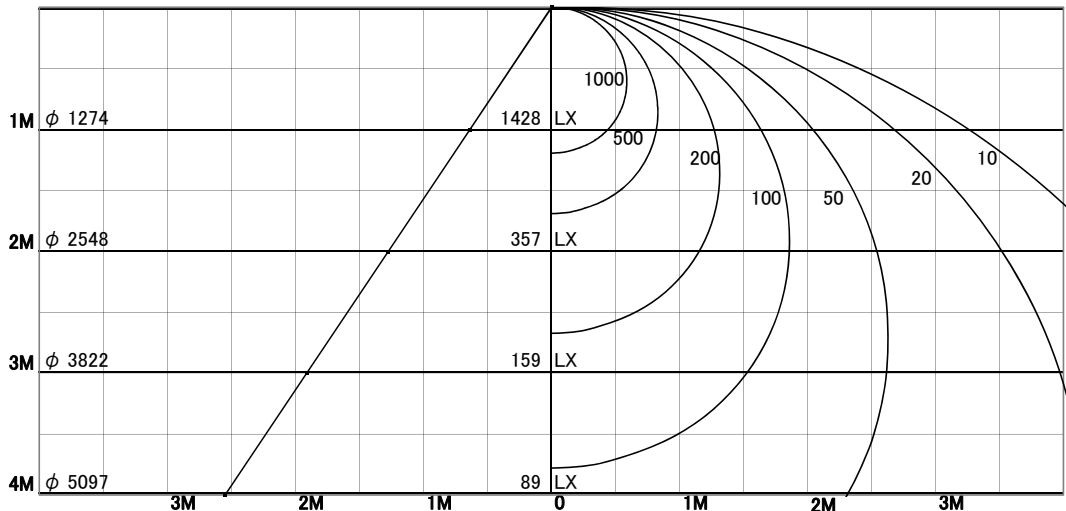

照 明 率 表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	52	40	33	28	51	40	33	28	48	39	32	28	46	38	32	28	26
0.80	60	49	41	36	58	48	41	36	56	47	40	35	53	46	40	35	33
1.00	66	56	48	43	65	55	48	42	62	53	47	42	59	52	46	42	40
1.25	72	62	55	49	70	61	54	49	67	59	53	49	64	58	53	48	46
1.50	76	67	60	55	74	66	60	54	71	64	58	54	68	62	57	53	51
2.00	81	74	68	63	80	73	67	63	77	71	66	62	74	69	65	61	59
2.50	85	78	73	69	83	77	73	68	80	75	71	68	78	73	70	67	64
3.00	87	82	77	73	86	81	76	73	83	79	75	72	80	77	73	71	68
4.00	90	86	82	78	89	85	81	78	86	83	79	77	83	80	78	76	73
5.00	92	88	85	82	90	87	84	81	88	85	82	80	85	83	81	79	76
7.00	94	91	89	86	93	90	88	86	90	88	86	84	88	86	84	83	80
10.00	96	94	92	90	94	92	91	89	92	90	89	87	90	88	87	86	83