


屋内照明器具特性




品名	LD-2985-L		
光源	LDA8L-G-K/60W×6		
実効光束 (器具光束)	3960lm	効率	84.6lm/W

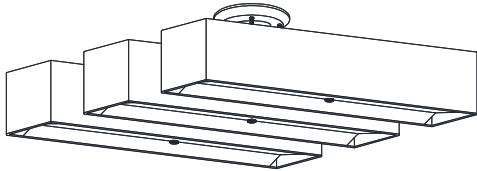

配光曲線図

実光度

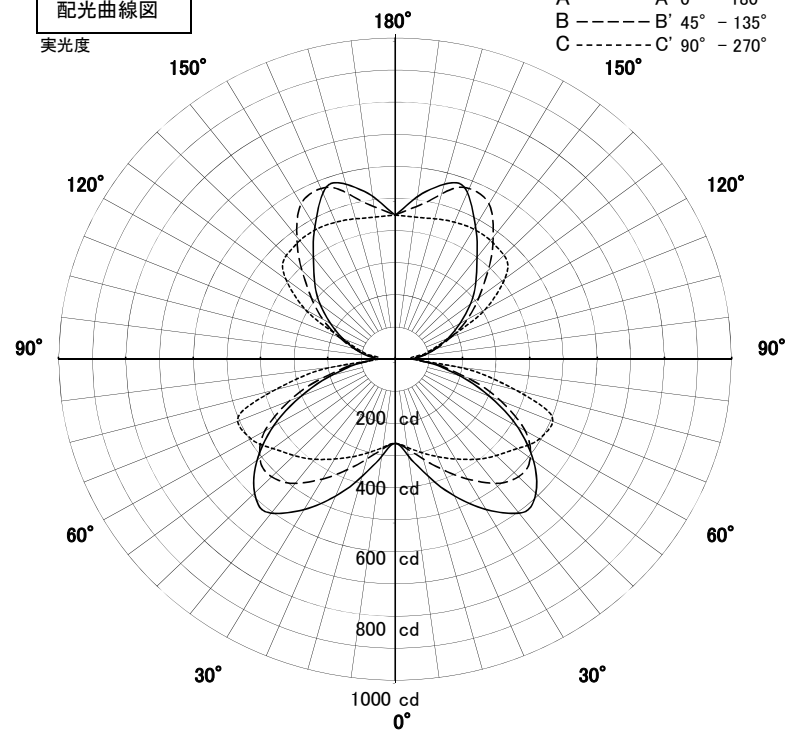


1/2照度角

直射水平面照度

単位:Lx

色温度	2700K	
演色評価指数	Ra80	
保守率	良	0.63
	中	0.6
	否	0.56

1/2照度角		
A-A'	102.5	Deg
C-C'	96.0	Deg
最大取付間隔		
A-A'	2.49	H
C-C'	2.22	H

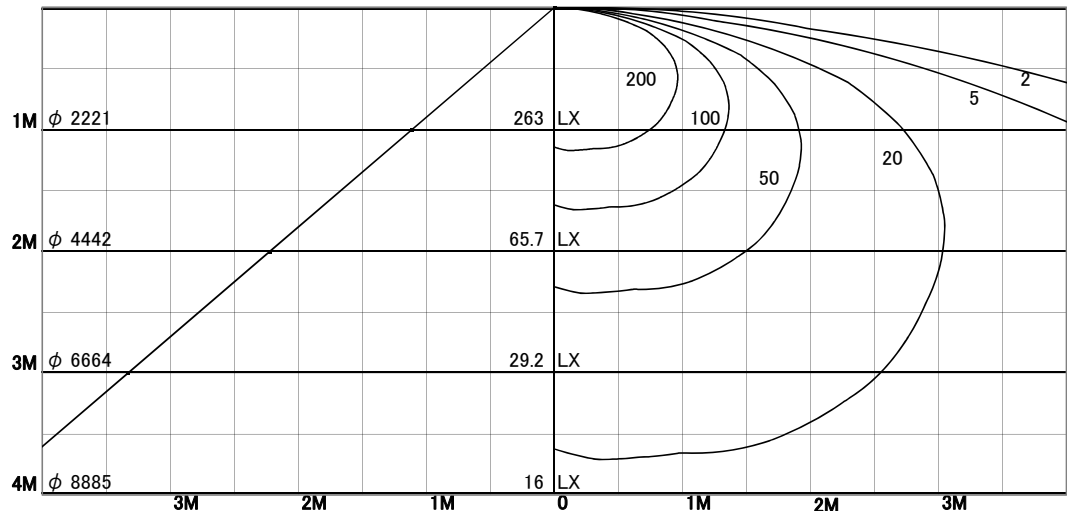

照 明 率 表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	28	20	15	11	27	20	15	11	25	19	15	11	24	18	14	11	10
0.80	33	25	20	16	32	25	20	16	30	24	19	16	29	23	19	16	15
1.00	37	30	24	20	36	29	24	20	34	28	24	20	32	27	23	20	19
1.25	41	34	29	25	40	33	29	25	38	32	28	25	36	31	27	24	23
1.50	44	37	32	29	42	37	32	28	40	35	31	28	38	34	31	28	26
2.00	47	42	38	34	46	41	37	34	44	40	37	34	42	39	36	33	32
2.50	50	45	42	38	49	45	41	38	47	43	40	37	45	42	39	37	35
3.00	52	48	44	41	51	47	44	41	49	46	43	40	47	44	42	40	38
4.00	54	51	48	45	53	50	47	45	51	48	46	44	49	47	45	43	42
5.00	55	52	50	48	54	52	49	47	52	50	48	47	51	49	47	46	44
7.00	57	55	53	51	56	54	52	51	54	53	51	50	53	51	50	49	47
10.00	58	56	55	54	57	56	54	53	56	54	53	52	54	53	52	51	50