


屋内照明器具特性




品名	LD-5319-W		
光源	LED20.4W		
実効光束 (器具光束)	2121lm	効率	104.lm/W

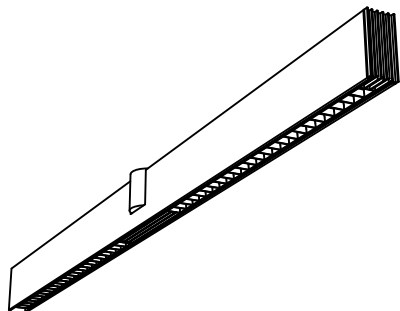

配光曲線図

実光度

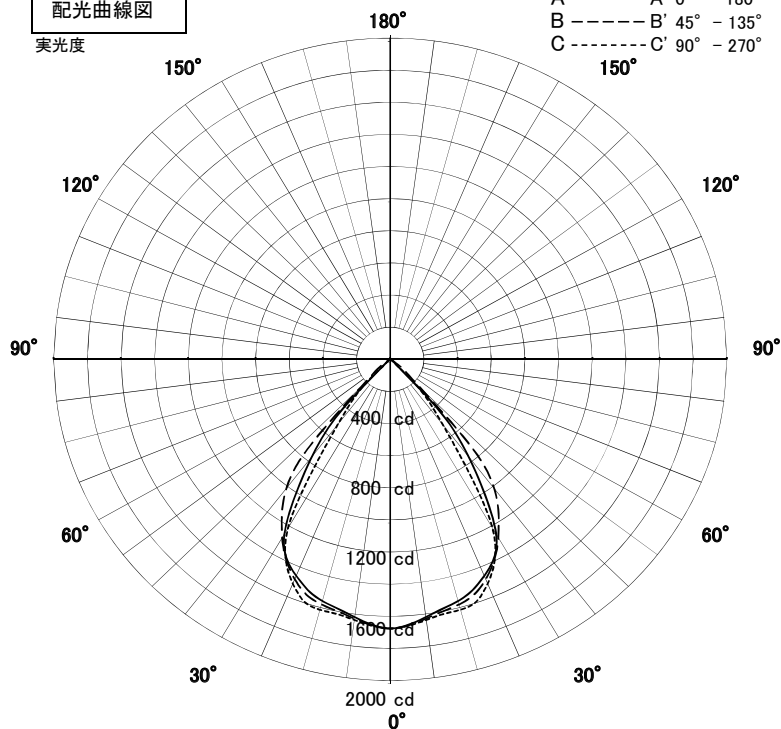


1/2照度角

直射水平面照度

単位:Lx

色温度	4000K	
演色評価指数	Ra83	
保守率	良	0.8
	中	0.6
	否	0.54

1/2照度角		
A-A'	59.0	Deg
C-C'	58.5	Deg
最大取付間隔		
A-A'	1.13	H
C-C'	1.12	H

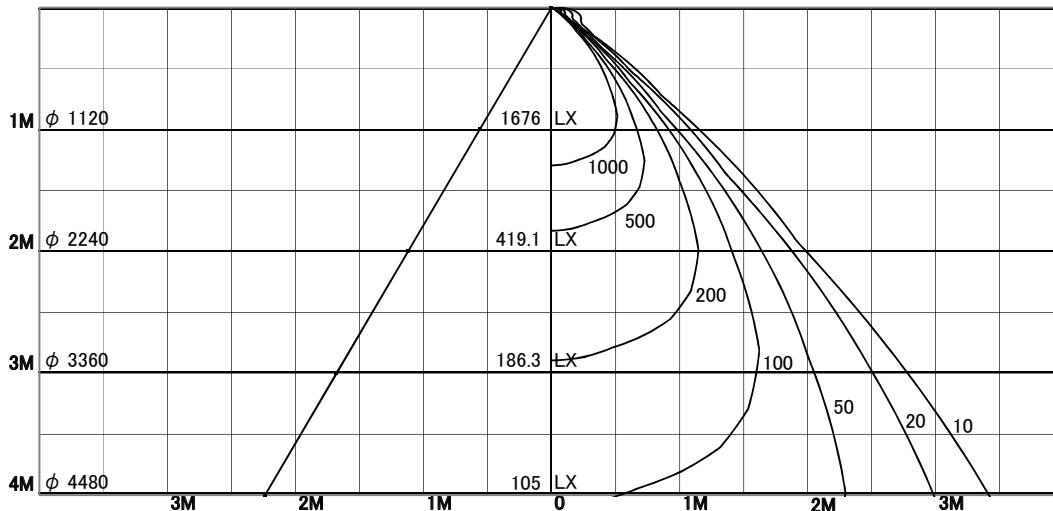

照 明 率 表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	81	74	69	66	81	74	69	66	79	73	69	66	78	72	69	66	65
0.80	88	81	77	73	87	81	76	73	85	80	76	73	83	79	75	73	71
1.00	93	87	83	80	92	86	82	79	90	85	82	79	88	84	81	79	77
1.25	97	92	88	85	96	91	88	85	94	90	87	84	92	89	86	84	82
1.50	100	95	92	89	98	94	91	88	96	93	90	88	95	92	89	87	86
2.00	103	100	97	95	102	99	97	95	100	98	96	94	98	96	94	93	91
2.50	106	103	101	99	105	102	100	98	103	101	99	97	101	99	98	96	94
3.00	107	105	103	102	106	104	103	101	104	102	101	100	102	101	100	99	97
4.00	108	107	106	104	107	106	105	104	105	104	103	102	103	102	102	101	99
5.00	109	108	107	106	108	107	106	105	106	105	104	104	104	103	103	102	100
7.00	110	109	109	108	109	108	108	107	107	106	106	105	105	104	104	104	101
10.00	111	110	110	109	110	109	109	108	107	107	107	106	105	105	105	105	102