


屋内照明器具特性




品名	LD-5320-L		
光源	LED20.4W		
実効光束 (器具光束)	1973lm	効率	96.7lm/W

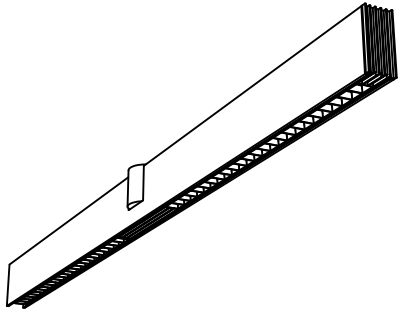

配光曲線図

実光度

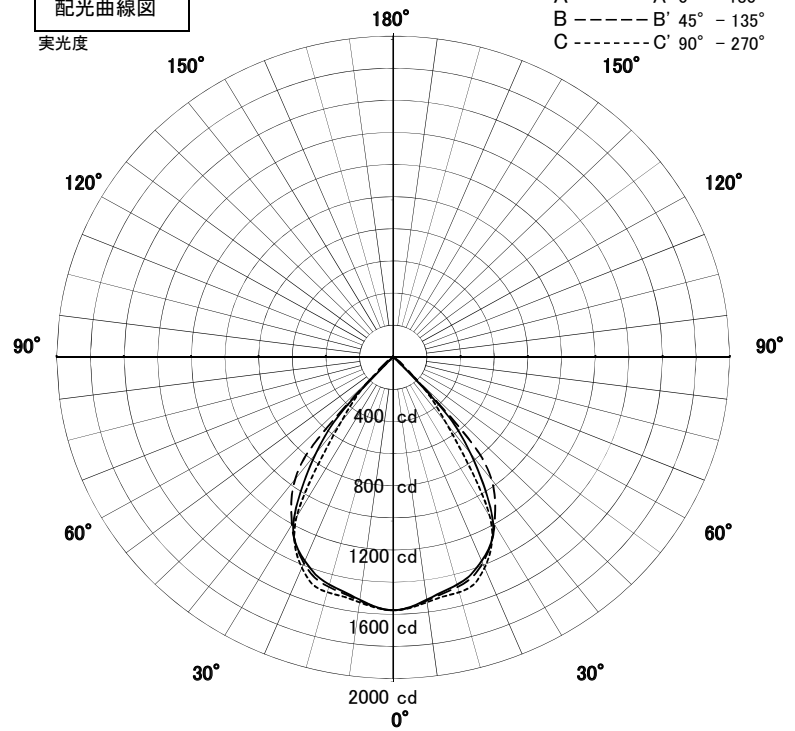


1/2照度角

直射水平面照度

単位: Lx

色温度	3000K	
演色評価指数	Ra83	
保守率	良	0.8
	中	0.6
	否	0.54

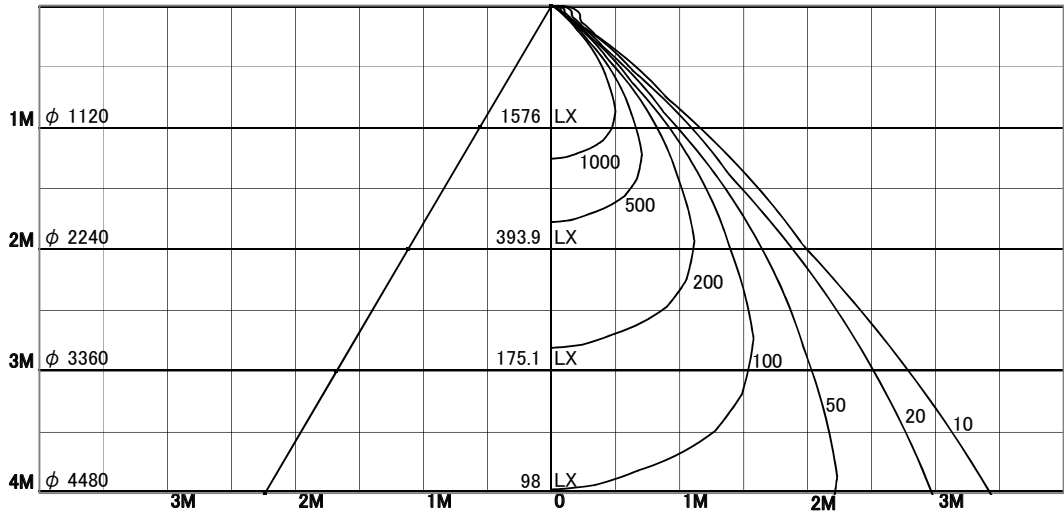

1/2照度角		
A-A'	59.0	Deg
C-C'	58.5	Deg
最大取付間隔		
A-A'	1.13	H
C-C'	1.12	H

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	83	75	70	67	82	75	70	67	80	74	70	67	79	73	70	67	66
0.80	89	82	78	74	88	82	77	74	86	81	77	74	85	80	76	74	72
1.00	94	88	84	81	93	88	84	80	91	86	83	80	89	85	82	80	78
1.25	98	93	89	86	97	92	89	86	95	91	88	85	93	90	87	85	83
1.50	101	96	93	90	100	96	92	90	98	94	91	89	96	93	90	88	87
2.00	105	101	99	96	104	100	98	96	102	99	97	95	100	97	96	94	92
2.50	107	104	102	100	106	103	101	100	104	102	100	99	102	100	99	98	96
3.00	108	106	105	103	107	105	104	102	105	104	102	101	103	102	101	100	98
4.00	110	108	107	106	109	107	106	105	107	105	104	104	105	104	103	102	100
5.00	111	109	108	107	109	108	107	106	107	106	106	105	105	105	104	103	101
7.00	111	111	110	109	110	110	109	108	108	108	107	107	106	106	105	105	102
10.00	112	111	111	111	111	110	110	110	109	108	108	108	107	106	106	106	103