


屋内照明器具特性




品名	PD-2612-L		
光源	LDA8L-G-K/60W×1		
実効光束 (器具光束)	751lm	効率	96.3lm/W

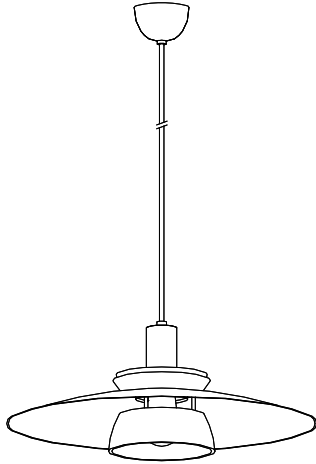

配光曲線図

実光度

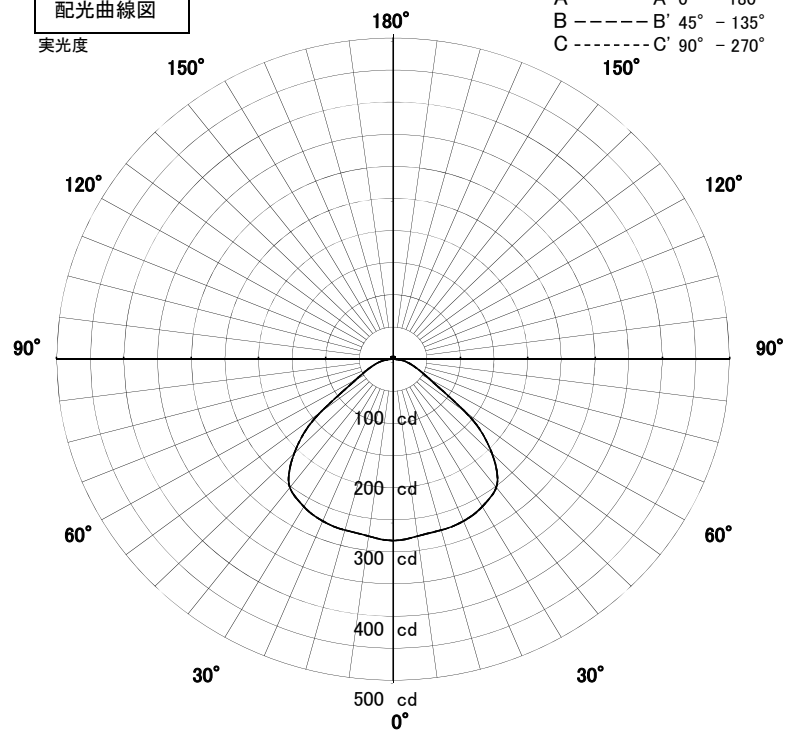


1/2照度角

直射水平面照度

単位:Lx

色温度		2700K
演色評価指数		Ra80
保守率	良	0.67
	中	0.63
	否	0.56

1/2照度角		
A-A'	69.5	Deg
C-C'	69.5	Deg
最大取付間隔		
A-A'	1.39	H
C-C'	1.39	H

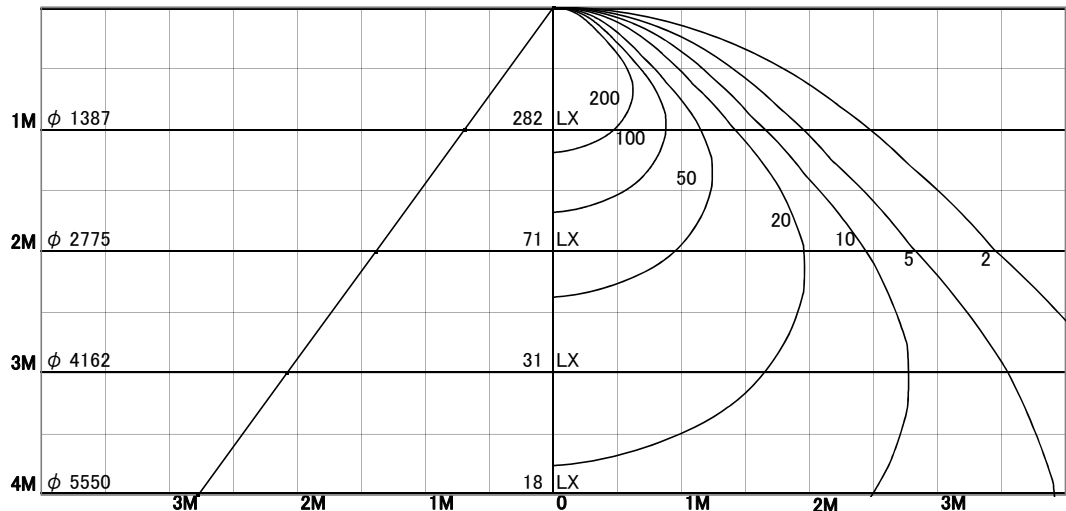

照明率表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	60	49	42	37	59	49	42	37	57	48	42	37	55	47	41	37	35
0.80	69	59	52	47	68	58	52	47	65	57	51	47	63	56	50	46	44
1.00	76	66	60	55	74	66	59	55	72	64	59	54	69	63	58	54	52
1.25	81	73	67	62	80	72	67	62	77	71	66	62	75	69	65	61	59
1.50	85	78	72	68	84	77	72	68	81	75	71	67	79	74	70	66	64
2.00	91	85	80	76	89	84	80	76	87	82	78	75	84	80	77	74	72
2.50	94	89	85	81	93	88	84	81	90	86	83	80	88	84	82	79	77
3.00	96	92	88	85	95	91	88	85	92	89	86	84	90	87	85	82	80
4.00	98	95	92	89	97	94	91	89	94	92	90	88	92	90	88	86	84
5.00	100	97	94	92	98	96	93	91	96	94	92	90	94	92	90	89	86
7.00	101	99	97	95	100	98	96	95	97	96	94	93	95	94	93	91	89
10.00	102	101	99	98	101	100	98	97	99	97	96	95	96	95	94	93	91