


屋内照明器具特性




品名	PD-2613-L		
光源	LDA4L-G-E17/S/40W		
実効光束 (器具光束)	346lm	効率	82.3lm/W



配光曲線図

実光度

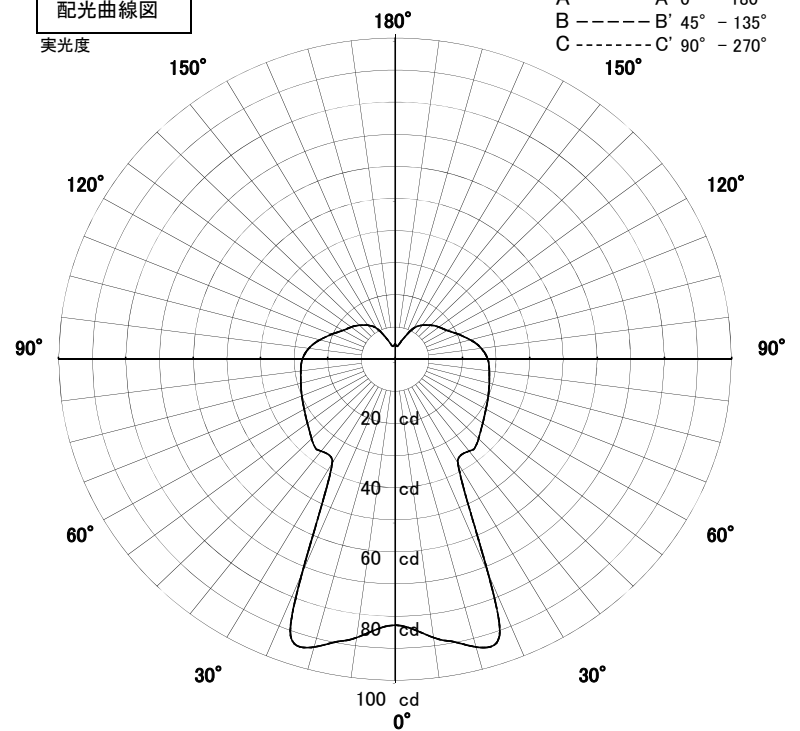


1/2照度角

直射水平面照度

単位:Lx

色温度		2700K
演色評価指数		Ra83
保守率	良	0.67
	中	0.63
	否	0.56

1/2照度角		
A-A'	51.5	Deg
C-C'	51.5	Deg
最大取付間隔		
A-A'	0.96	H
C-C'	0.96	H

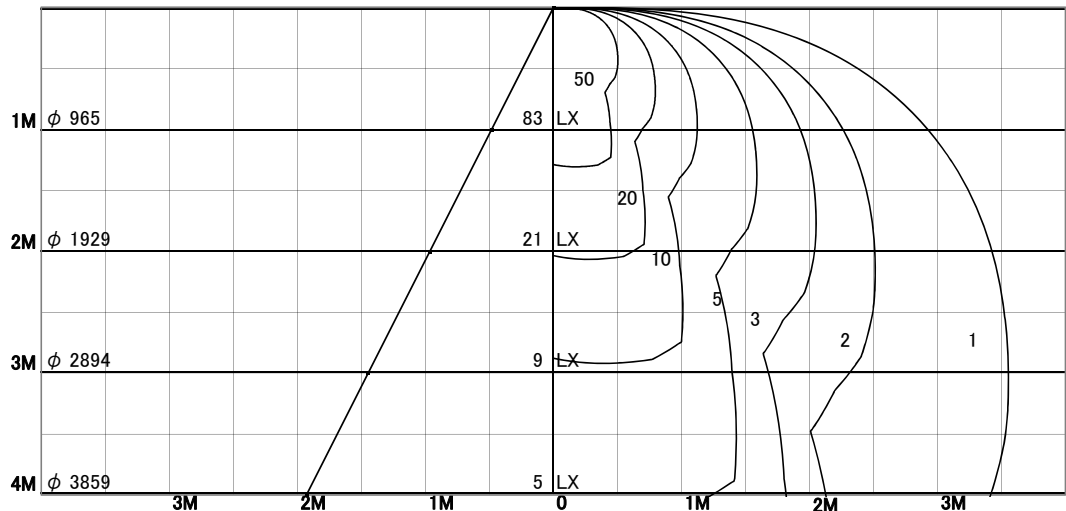

照 明 率 表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	33	25	19	16	32	24	19	16	31	24	19	16	29	23	19	16	14
0.80	38	30	24	20	37	29	24	20	35	28	23	20	33	27	23	20	18
1.00	42	34	28	24	41	33	28	24	39	32	27	23	37	31	27	23	22
1.25	46	38	32	28	44	37	32	28	42	36	31	27	40	35	30	27	25
1.50	48	41	35	31	47	40	35	31	45	39	34	30	42	38	33	30	28
2.00	52	46	41	36	51	45	40	36	48	43	39	36	46	42	38	35	33
2.50	55	49	44	40	53	48	44	40	51	47	43	39	49	45	42	39	37
3.00	56	51	47	43	55	50	46	43	53	49	45	42	51	47	44	42	40
4.00	59	54	51	47	58	54	50	47	55	52	49	46	53	50	48	45	43
5.00	60	57	53	50	59	56	53	50	57	54	51	49	55	52	50	48	46
7.00	62	59	56	54	61	58	56	53	59	57	55	52	57	55	53	52	50
10.00	64	61	59	57	63	61	59	57	61	59	57	56	59	57	56	54	52