


屋内照明器具特性



品名	PD-2614-L		
光源	LDA8L-G-K/60W×1		
実効光束 (器具光束)	737lm	効率	94.5lm/W

配光曲線図

実光度

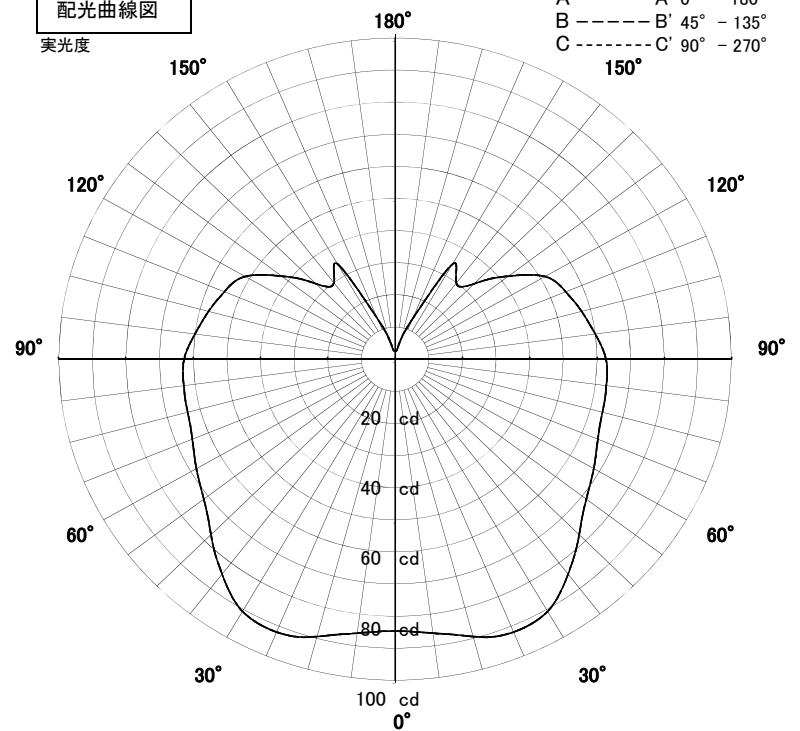


1/2照度角

直射水平面照度

単位: Lx

色温度	2700K	
演色評価指数	Ra80	
保守率	良	0.67
	中	0.63
	否	0.56

1/2照度角		
A-A'	75.0	Deg
C-C'	75.0	Deg
最大取付間隔		
A-A'	1.53	H
C-C'	1.53	H

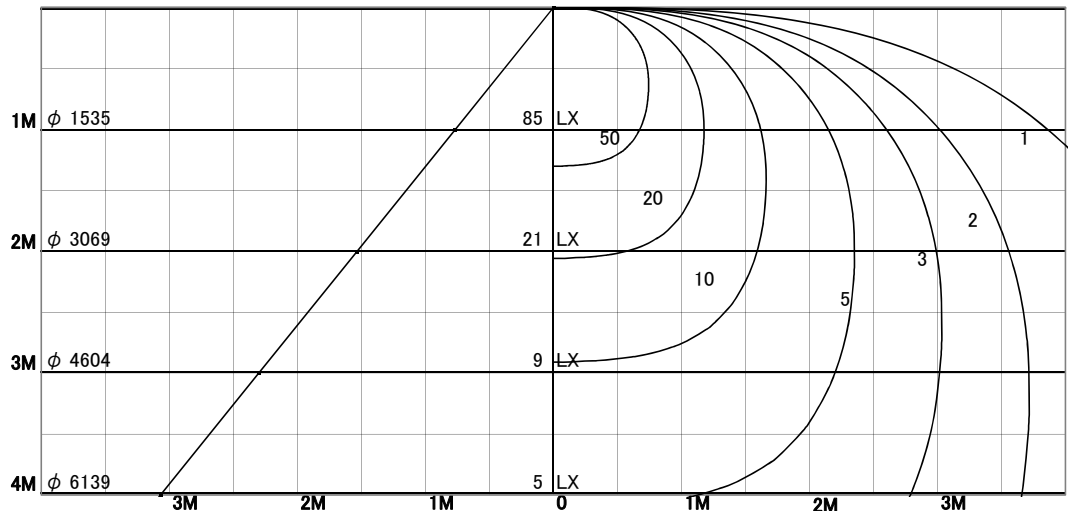

照 明 率 表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	31	23	17	14	30	22	17	14	29	22	17	14	27	21	17	13	12
0.80	36	28	22	18	35	27	22	18	33	26	21	18	32	25	21	17	16
1.00	40	32	26	22	39	31	26	21	37	30	25	21	35	29	25	21	19
1.25	44	36	30	25	43	35	30	25	40	34	29	25	38	33	28	25	23
1.50	46	39	33	29	45	38	33	29	43	37	32	28	41	36	31	28	26
2.00	50	44	38	34	49	43	38	34	47	41	37	33	44	40	36	33	31
2.50	53	47	42	38	52	46	42	38	49	45	41	37	47	43	40	37	35
3.00	55	49	45	41	53	49	44	41	51	47	43	40	49	45	42	39	37
4.00	57	53	49	45	56	52	48	45	54	50	47	44	51	48	46	43	41
5.00	59	55	51	48	57	54	51	48	55	52	49	47	53	51	48	46	44
7.00	61	57	55	52	59	57	54	51	57	55	53	50	55	53	51	50	48
10.00	62	60	57	55	61	59	57	55	59	57	55	54	57	56	54	53	51