


屋内照明器具特性




品名	PD-2622-L+KP-4091		
光源	LDA14L-G/100W×1		
実効光束 (器具光束)	1502lm	効率	105.0lm/W

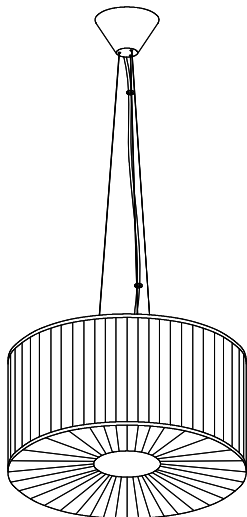

配光曲線図

実光度

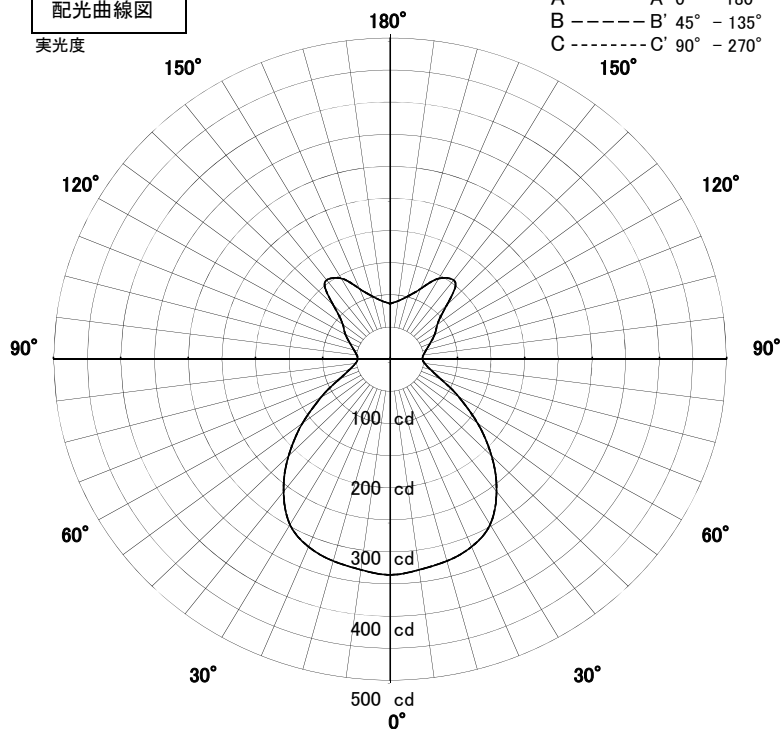


1/2照度角

直射水平面照度

単位: Lx

色温度		2700K
演色評価指数		Ra80
保守率	良	0.67
	中	0.63
	否	0.56

1/2照度角		
A-A'	66.0	Deg
C-C'	66.0	Deg
最大取付間隔		
A-A'	1.30	H
C-C'	1.30	H

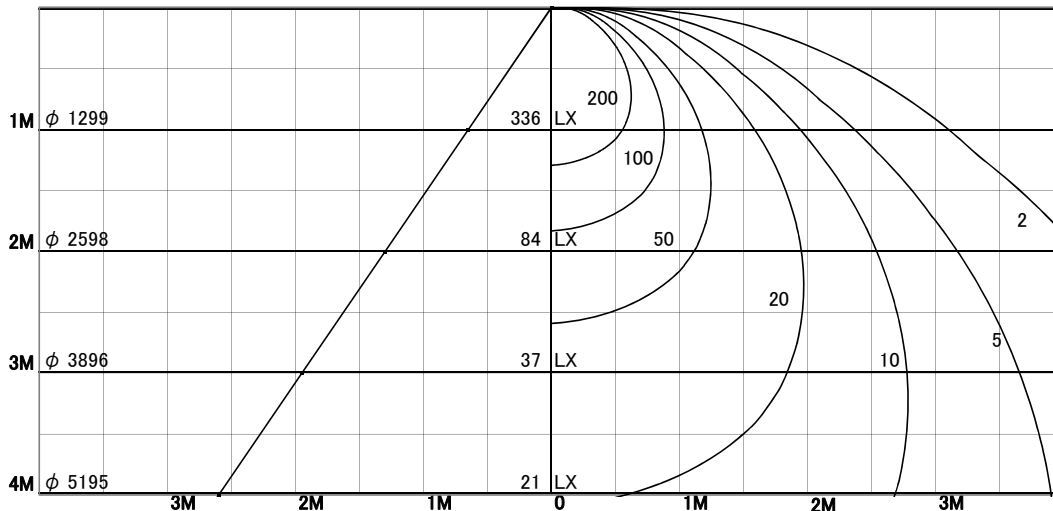

照 明 率 表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	37	29	25	21	36	29	24	21	35	28	24	21	33	28	24	21	20
0.80	42	35	30	27	41	35	30	26	40	34	30	26	38	33	29	26	25
1.00	46	40	35	31	45	39	35	31	44	38	34	31	42	37	34	31	29
1.25	50	44	39	36	49	43	39	36	47	42	38	35	45	41	38	35	33
1.50	53	47	43	39	52	46	42	39	50	45	42	39	48	44	41	38	37
2.00	56	52	48	45	55	51	47	44	53	50	47	44	52	48	46	43	42
2.50	59	55	51	48	58	54	51	48	56	52	50	47	54	51	49	47	45
3.00	60	57	54	51	59	56	53	51	57	54	52	50	55	53	51	49	48
4.00	62	59	57	54	61	58	56	54	59	57	55	53	57	56	54	52	51
5.00	63	61	58	56	62	60	58	56	60	58	57	55	59	57	56	54	52
7.00	64	63	61	59	64	62	60	59	62	60	59	58	60	59	58	57	55
10.00	65	64	63	61	65	63	62	61	63	62	61	60	61	60	59	59	57