


屋内照明器具特性



品名	PD-2632-L+KF-4085		
光源	LDA8L-G-K/60W×1		
実効光束 (器具光束)	633lm	効率	81.1lm/W

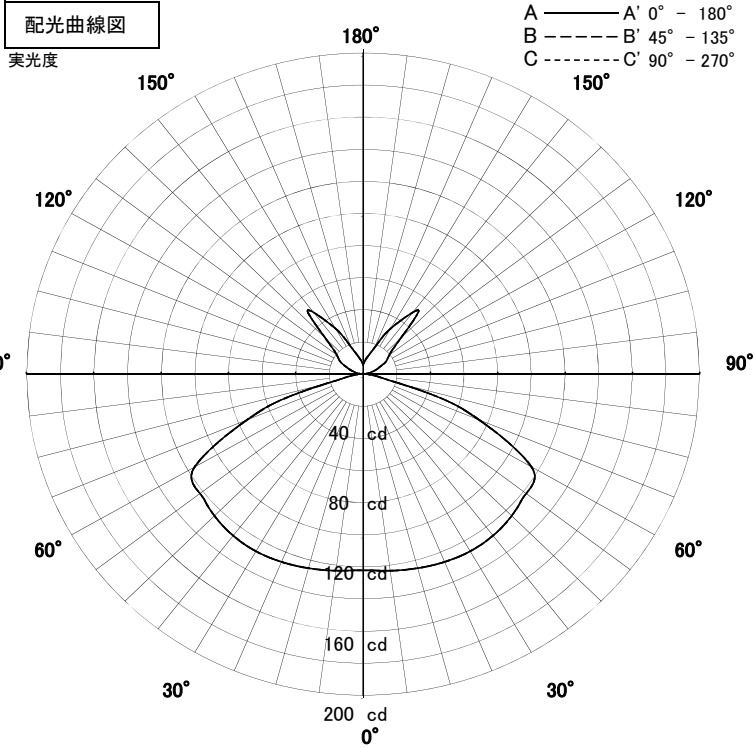


1/2照度角

直射水平面照度

単位:Lx

色温度		2700K
演色評価指数		Ra80
保守率	良	0.67
	中	0.63
	否	0.56

1/2照度角		
A-A'	76.5	Deg
C-C'	76.5	Deg
最大取付間隔		
A-A'	1.58	H
C-C'	1.58	H

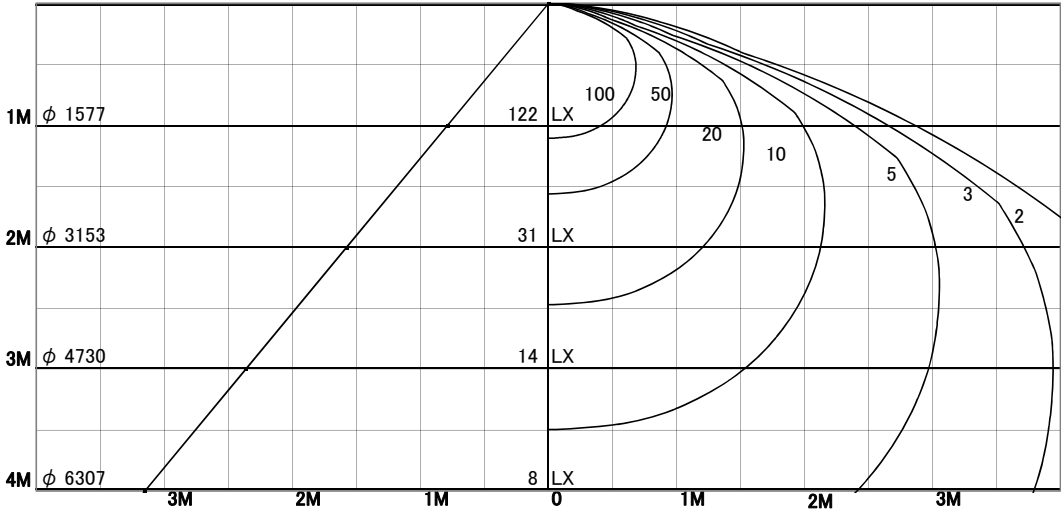

照 明 率 表																	
天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	44	33	26	21	43	33	26	21	41	32	26	21	39	31	25	21	19
0.80	52	41	34	29	51	41	34	29	48	40	33	29	46	38	33	29	27
1.00	58	48	41	36	56	47	41	36	54	46	40	35	51	45	39	35	33
1.25	63	55	48	43	62	54	47	43	59	52	47	42	57	51	46	42	40
1.50	67	59	53	48	66	58	53	48	63	57	52	47	61	55	51	47	45
2.00	73	66	61	57	71	65	61	56	69	64	59	56	66	62	58	55	53
2.50	76	71	66	62	75	70	66	62	72	68	64	61	70	66	63	60	58
3.00	79	74	70	67	77	73	69	66	75	71	68	65	73	70	67	64	62
4.00	82	78	75	72	80	77	74	71	78	75	73	70	76	73	71	69	67
5.00	83	80	78	75	82	79	77	75	80	78	75	74	78	76	74	72	70
7.00	85	83	81	79	84	82	80	79	82	80	79	77	80	79	77	76	74
10.00	87	85	84	83	86	84	83	82	83	82	81	80	82	81	80	79	76