


屋内照明器具特性




品名	PD-2644-L		
光源	LDA14L-G/100W		
実効光束 (器具光束)	2287lm	効率	79.9lm/W

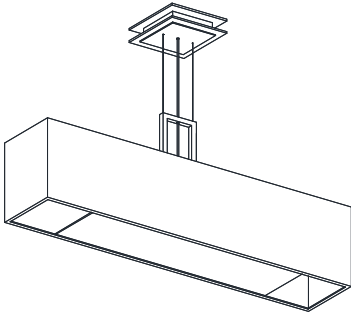

配光曲線図

実光度

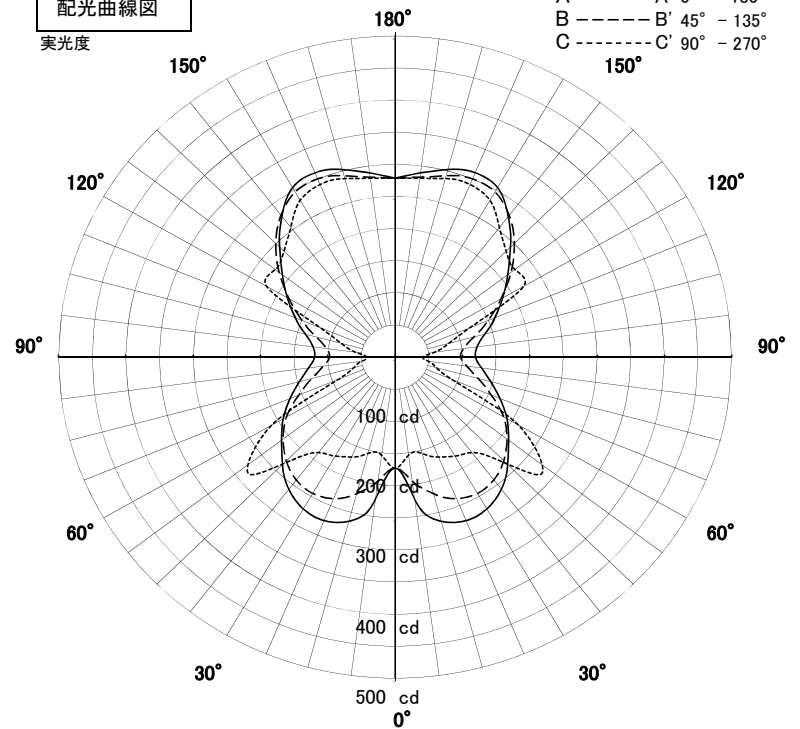


1/2照度角

直射水平面照度

単位:Lx

色温度	2700K	
演色評価指数	Ra80	
保守率	良	0.67
	中	0.63
	否	0.56

1/2照度角		
A-A'	89.0	Deg
C-C'	88.0	Deg
最大取付間隔		
A-A'	1.97	H
C-C'	1.93	H

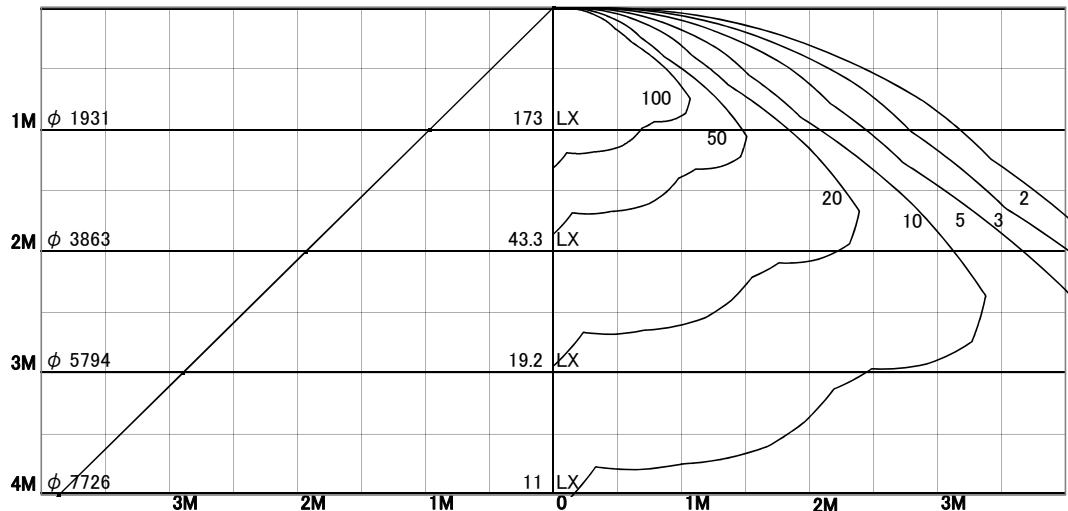

照 明 率 表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	24	18	14	11	24	18	14	11	22	17	13	11	21	16	13	11	10
0.80	29	22	18	15	28	22	18	15	26	21	17	15	25	21	17	14	13
1.00	32	26	21	18	31	25	21	18	30	25	21	18	28	24	20	18	17
1.25	35	29	25	22	34	29	25	22	32	28	24	21	31	27	24	21	20
1.50	37	32	28	25	36	31	28	24	35	30	27	24	33	29	26	24	23
2.00	40	36	32	29	39	35	32	29	38	34	31	28	36	33	30	28	27
2.50	42	38	35	32	41	38	35	32	40	37	34	32	38	35	33	31	30
3.00	44	40	37	35	43	40	37	34	41	38	36	34	40	37	35	33	32
4.00	45	43	40	38	45	42	40	37	43	41	39	37	42	40	38	36	35
5.00	47	44	42	40	46	43	41	39	44	42	40	39	43	41	40	38	37
7.00	48	46	44	42	47	45	44	42	46	44	43	41	44	43	42	41	39
10.00	49	47	46	45	48	47	46	44	47	46	45	43	46	45	44	43	41