

# 屋内照明器具特性




品名	PD-2698-L		
光源	LDA4L-G-E17/S/40W		
実効光束 (器具光束)	412lm	効率	98.0lm/W



配光曲線図

実光度

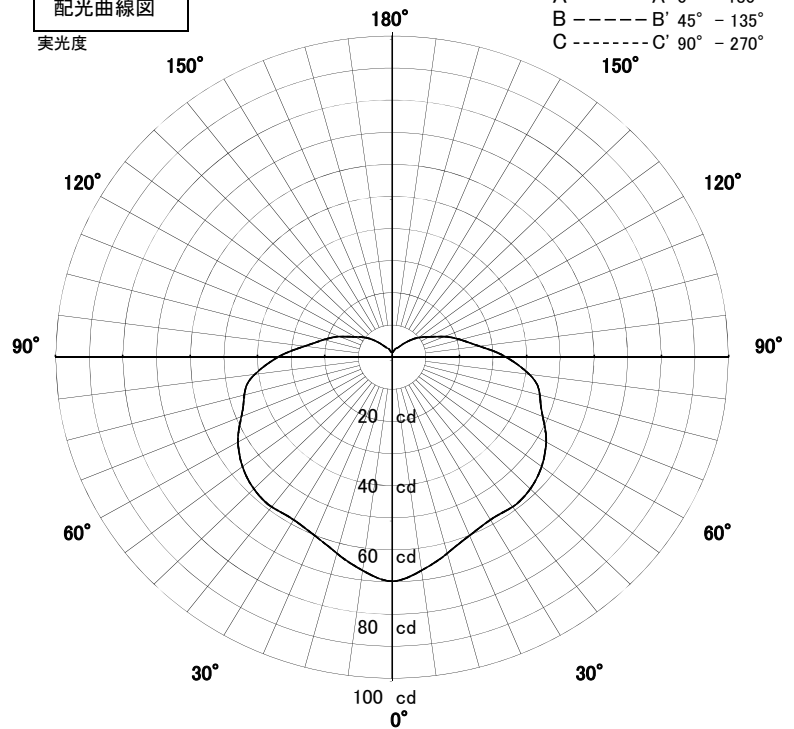


1/2照度角

直射水平面照度

単位:Lx

色温度	2700K	
演色評価指数	Ra83	
保守率	良	0.67
	中	0.63
	否	0.56

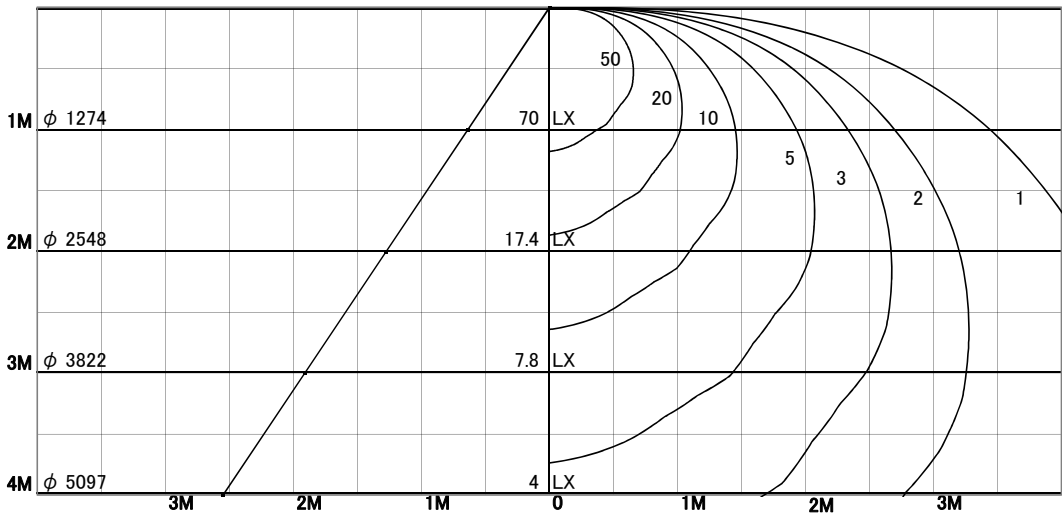

1/2照度角		
A-A'	65.0	Deg
C-C'	65.0	Deg
最大取付間隔		
A-A'	1.27	H
C-C'	1.27	H

照明率表

	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
天井	10%																0%
壁	10%																0%
床	10%																0%
0.60	39	28	21	17	38	28	21	16	36	27	21	16	34	26	20	16	15
0.80	46	35	27	22	44	34	27	22	42	33	27	22	40	32	26	22	20
1.00	51	40	33	27	49	39	32	27	47	38	32	27	44	37	31	26	24
1.25	55	46	38	32	54	45	38	32	51	43	37	32	48	41	36	31	29
1.50	59	50	42	37	57	49	42	36	54	47	41	36	52	45	40	36	33
2.00	64	56	49	44	62	55	49	43	59	53	47	43	56	51	46	42	40
2.50	67	60	54	49	66	59	53	48	63	57	52	48	60	55	51	47	45
3.00	70	63	58	53	68	62	57	52	65	60	55	51	62	58	54	51	48
4.00	73	67	62	58	71	66	62	58	68	64	60	57	66	62	59	56	53
5.00	75	70	66	62	73	69	65	61	70	67	63	60	68	65	62	59	57
7.00	77	73	70	67	76	72	69	66	73	70	67	65	71	68	66	64	61
10.00	79	76	73	71	78	75	73	70	75	73	71	69	73	71	69	68	65