

屋内照明器具特性




| | | | |
|----------------|------------|----|----------|
| 品名 | PD-2904-LL | | |
| 光源 | LED 8.4W | | |
| 実効光束 (器具光束) | 251lm | 効率 | 29.8lm/W |



配光曲線図

実光度

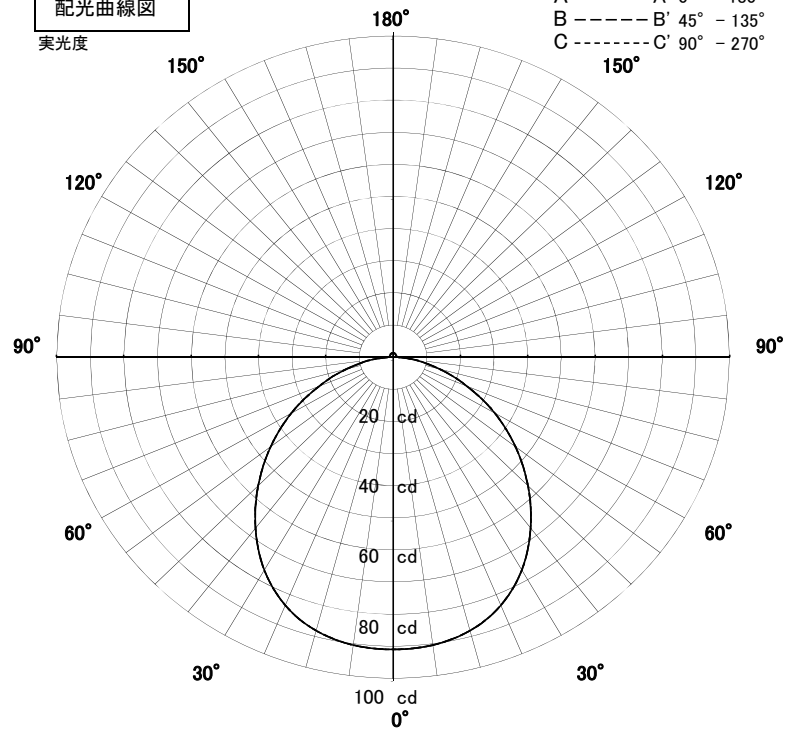


1/2照度角

直射水平面照度

単位:Lx

| | | |
|--------|-------|------|
| 色温度 | 2700K | |
| 演色評価指数 | Ra80 | |
| 保守率 | 良 | 0.67 |
| | 中 | 0.63 |
| | 否 | 0.56 |

| | | |
|--------|------|-----|
| 1/2照度角 | | |
| A-A' | 63.5 | Deg |
| C-C' | 63.5 | Deg |
| 最大取付間隔 | | |
| A-A' | 1.24 | H |
| C-C' | 1.24 | H |

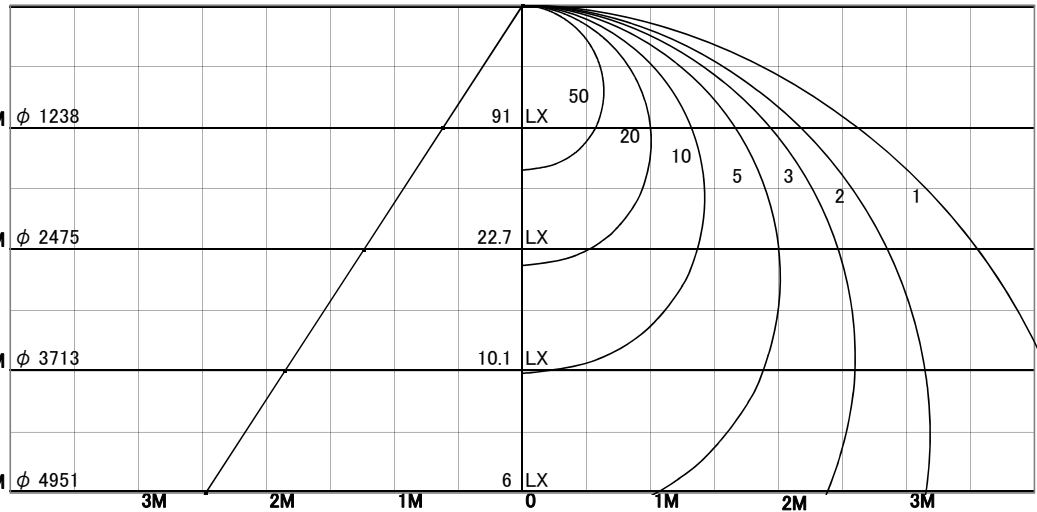

照明率表

| 天井 | 80% | | | | 70% | | | | 50% | | | | 30% | | | | 0% |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|
| | 70% | 50% | 30% | 10% | 70% | 50% | 30% | 10% | 70% | 50% | 30% | 10% | 70% | 50% | 30% | 10% | 0% |
| 壁 | 10% | | | | | | | | | | | | | | | | 0% |
| 床 | 10% | | | | | | | | | | | | | | | | 0% |
| 0.60 | 58 | 46 | 39 | 34 | 56 | 46 | 39 | 34 | 54 | 45 | 38 | 33 | 52 | 44 | 38 | 33 | 32 |
| 0.80 | 66 | 55 | 48 | 42 | 65 | 55 | 48 | 42 | 62 | 53 | 47 | 42 | 60 | 52 | 46 | 42 | 40 |
| 1.00 | 73 | 63 | 55 | 50 | 71 | 62 | 55 | 50 | 69 | 60 | 54 | 49 | 66 | 59 | 53 | 49 | 47 |
| 1.25 | 79 | 70 | 63 | 57 | 77 | 69 | 62 | 57 | 74 | 67 | 61 | 57 | 72 | 65 | 60 | 56 | 54 |
| 1.50 | 83 | 75 | 68 | 63 | 81 | 74 | 68 | 63 | 78 | 72 | 66 | 62 | 76 | 70 | 65 | 61 | 59 |
| 2.00 | 89 | 82 | 76 | 72 | 87 | 81 | 76 | 71 | 84 | 79 | 74 | 71 | 82 | 77 | 73 | 70 | 67 |
| 2.50 | 92 | 87 | 82 | 78 | 91 | 85 | 81 | 77 | 88 | 83 | 80 | 76 | 85 | 82 | 78 | 75 | 73 |
| 3.00 | 95 | 90 | 86 | 82 | 93 | 89 | 85 | 81 | 90 | 87 | 83 | 80 | 88 | 85 | 82 | 79 | 77 |
| 4.00 | 97 | 94 | 90 | 87 | 96 | 93 | 89 | 87 | 93 | 90 | 88 | 85 | 91 | 88 | 86 | 84 | 81 |
| 5.00 | 99 | 96 | 93 | 90 | 98 | 95 | 92 | 90 | 95 | 93 | 90 | 88 | 93 | 91 | 89 | 87 | 84 |
| 7.00 | 101 | 99 | 97 | 95 | 100 | 98 | 96 | 94 | 97 | 96 | 94 | 92 | 95 | 93 | 92 | 91 | 88 |
| 10.00 | 103 | 101 | 99 | 98 | 101 | 100 | 98 | 97 | 99 | 98 | 96 | 95 | 97 | 95 | 94 | 93 | 91 |