


# 屋内照明器具特性




品名	SD-4426-L		
光源	LDA6L-H-E17/S × 1灯		
実効光束 (器具光束)	234lm	効率	41.8lm/W



配光曲線図

実光度

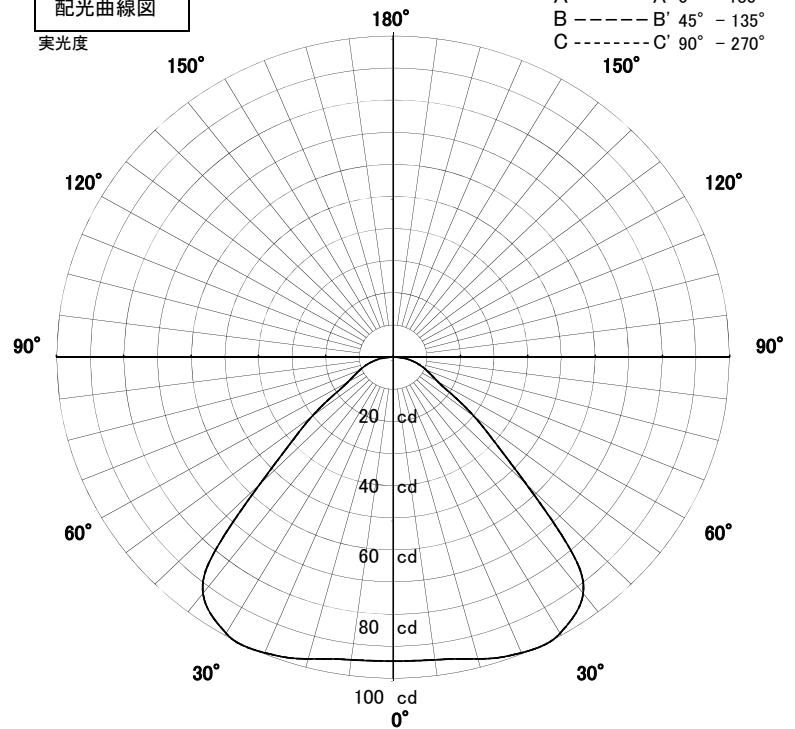

A ——— A' 0° - 180°  
 B - - - - - B' 45° - 135°  
 C - - - - - C' 90° - 270°


1/2照度角

直射水平面照度

単位:Lx

色温度	2700K	
演色評価指数	Ra80	
保守率	良	0.8
	中	0.6
	否	0.54

1/2照度角		
A-A'	73.5	Deg
C-C'	73.5	Deg
最大取付間隔		
A-A'	1.49	H
C-C'	1.49	H

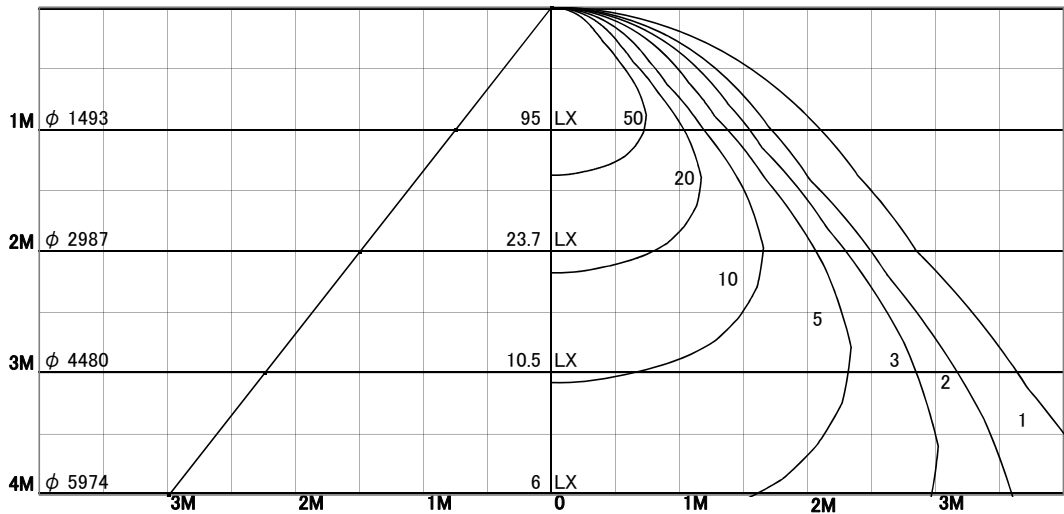

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	66	56	49	45	65	55	49	45	63	55	49	45	61	54	48	45	43
0.80	75	65	59	54	73	65	58	54	71	63	58	53	69	62	57	53	51
1.00	81	72	66	61	80	72	66	61	77	70	65	61	75	69	64	61	59
1.25	86	79	73	68	85	78	72	68	82	76	72	68	80	75	71	67	65
1.50	90	83	78	74	89	82	77	73	86	81	76	73	84	79	75	72	70
2.00	95	90	85	82	94	89	85	81	91	87	83	80	89	85	82	80	77
2.50	98	94	90	87	97	93	89	86	94	91	88	85	92	89	87	84	82
3.00	100	96	93	90	99	95	92	90	96	93	91	89	94	92	89	87	85
4.00	102	99	97	94	101	98	96	94	99	96	94	92	96	94	93	91	89
5.00	104	101	99	97	102	100	98	96	100	98	96	95	98	96	95	93	91
7.00	105	103	102	100	104	102	101	99	101	100	99	97	99	98	97	96	93
10.00	106	105	103	102	105	104	102	101	103	101	100	99	100	99	99	98	95