


屋内照明器具特性




品名	DE-2656		
光源	GY6.35_J12V35W		
光束	600 Lm	灯数	1 灯

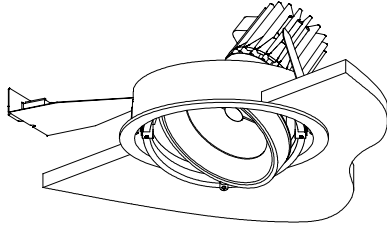

配光曲線図

cd/1000lm

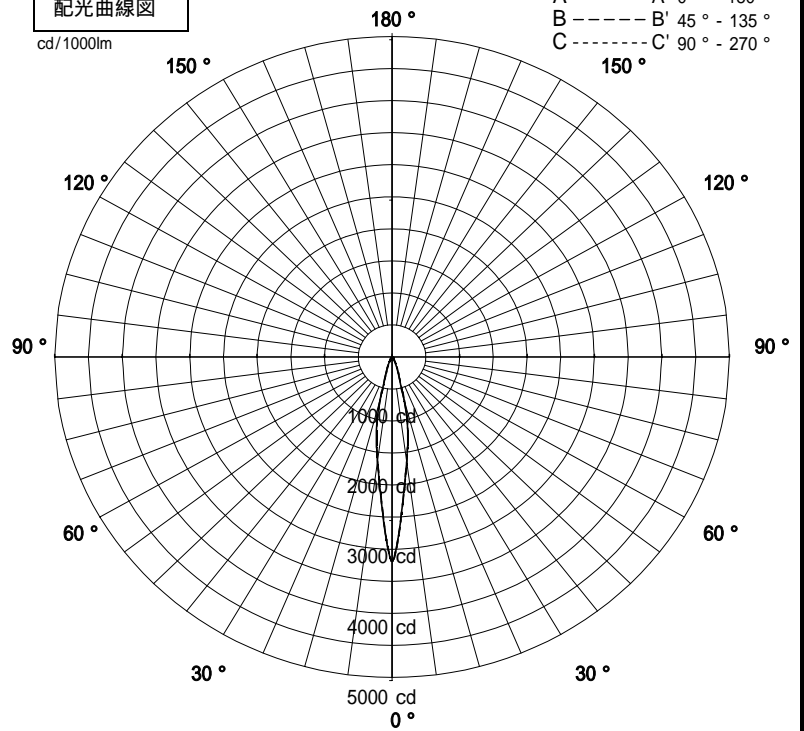


1/2照度角

直射水平面照度

単位:Lx

器具効率	46.6	%
上方効率	0.0	%
下方効率	46.6	%
保守率	良	0.84
	中	0.79
	否	0.7
1/2照度角		
A - A'	17.5	H
C - C'	17.5	H
最大取付間隔		
A - A'	0.31	H
C - C'	0.31	H

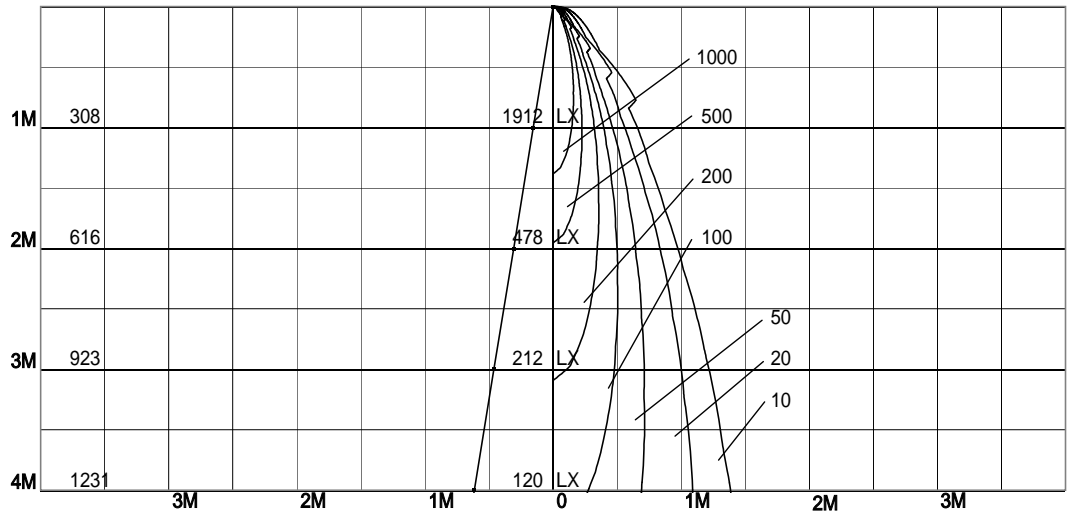

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	33	31	29	28	33	31	29	28	32	30	29	28	32	30	29	28	28
0.80	35	33	31	30	35	33	31	30	34	32	31	30	33	32	31	30	29
1.00	37	35	33	32	36	34	33	32	36	34	33	32	35	34	33	32	31
1.25	38	36	35	34	37	36	35	34	37	35	34	34	36	35	34	33	33
1.50	39	37	36	35	38	37	36	35	37	36	35	35	37	36	35	34	34
2.00	40	39	38	37	39	38	38	37	39	38	37	37	38	37	37	36	36
2.50	41	40	39	39	40	39	39	38	40	39	38	38	39	38	38	37	37
3.00	41	41	40	40	41	40	40	39	40	40	39	39	39	39	39	38	38
4.00	42	41	41	40	41	41	41	40	41	40	40	40	40	40	39	39	38
5.00	42	42	41	41	42	41	41	41	41	41	40	40	40	40	40	40	39
7.00	42	42	42	42	42	42	42	41	41	41	41	41	40	40	40	40	39
10.00	42	42	42	42	42	42	42	42	41	41	41	41	41	41	41	41	40