




屋内照明器具特性



品番	DE-2504		
光源	JD110V215WN-EH		
光束	4730Lm	灯数	1

配光曲線

cd/1000Lm

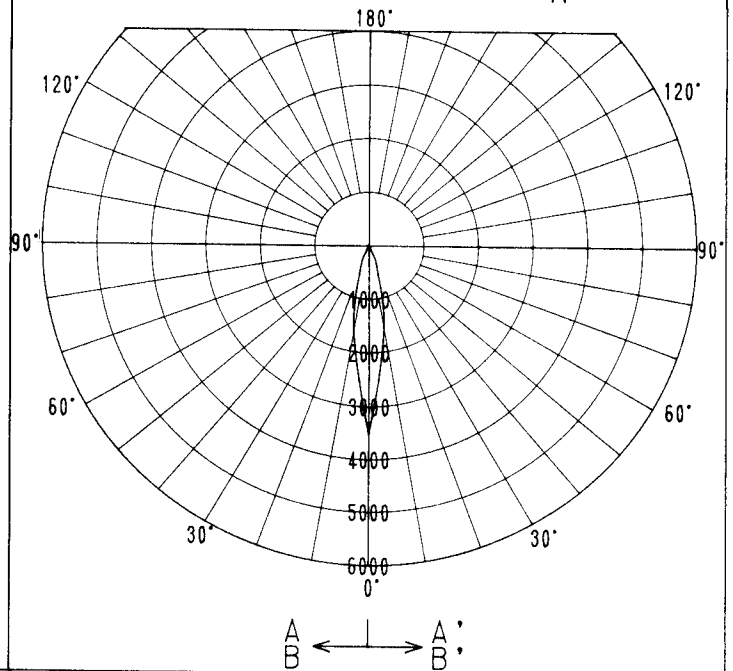


110V測定

直射水平面照度

単位：Lx

器具効率	62.5%
上方光束	0.0%
下方光束	62.5%
保守率	良 0.79
	中 0.74
	否 0.70
最大取付間隔	
A-A'	0.31H
B-B'	0.31H

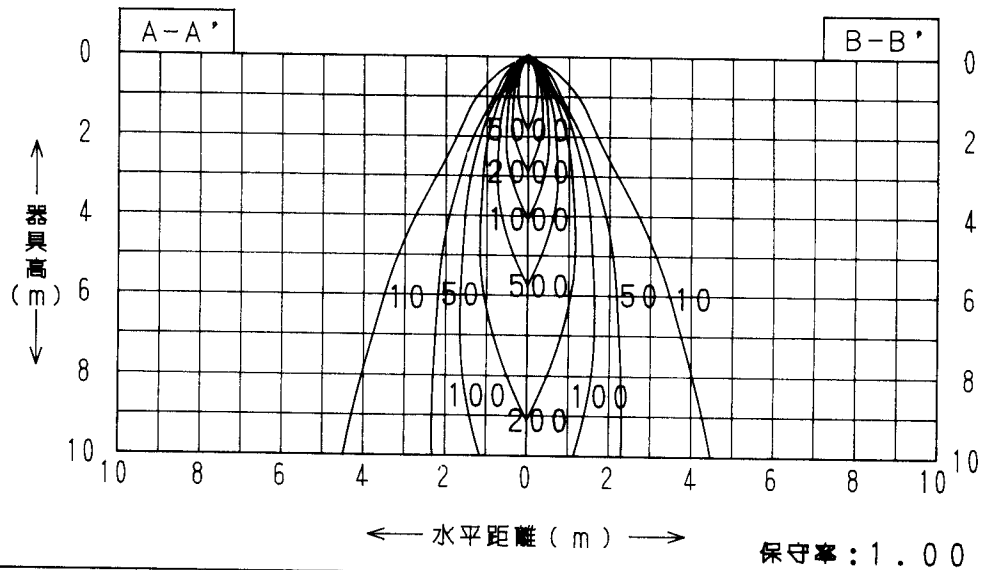

保守率：1.00

照明率表

	80%				70%				50%				30%				0
	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	
天井面	10%																
壁面	10%																
床面	10%																
室指数	10%																
0.60	53	50	47	46	53	50	47	46	52	49	47	46	51	49	47	46	45
0.80	56	53	51	49	56	53	50	49	55	52	50	49	54	52	50	49	48
1.00	59	56	54	52	58	56	54	52	57	55	53	52	56	54	53	52	51
1.25	61	58	56	55	60	58	56	55	59	57	56	54	58	56	55	54	53
1.50	62	60	58	57	61	59	58	56	60	59	57	56	59	58	57	56	55
2.00	64	62	61	60	63	62	61	60	62	61	60	59	61	60	59	59	57
2.50	65	64	63	62	65	63	63	62	63	63	62	61	62	62	61	60	59
3.00	66	65	64	64	65	65	64	63	64	64	63	63	63	63	62	62	61
4.00	67	66	66	65	66	66	65	65	65	65	64	64	64	64	63	63	62
5.00	67	67	66	66	67	66	66	66	65	65	65	65	64	64	64	64	62
7.00	68	68	67	67	67	67	67	67	66	66	66	66	65	65	65	65	63
10.00	68	68	68	68	67	67	67	67	66	66	66	66	65	65	65	65	63