


# 屋内照明器具特性




品名	DD-2979		
光源	COOLWHITE		
光束	91 Lm	灯数	3 灯

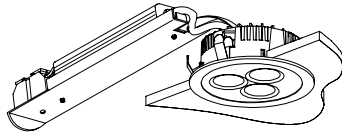

配光曲線図

実光度

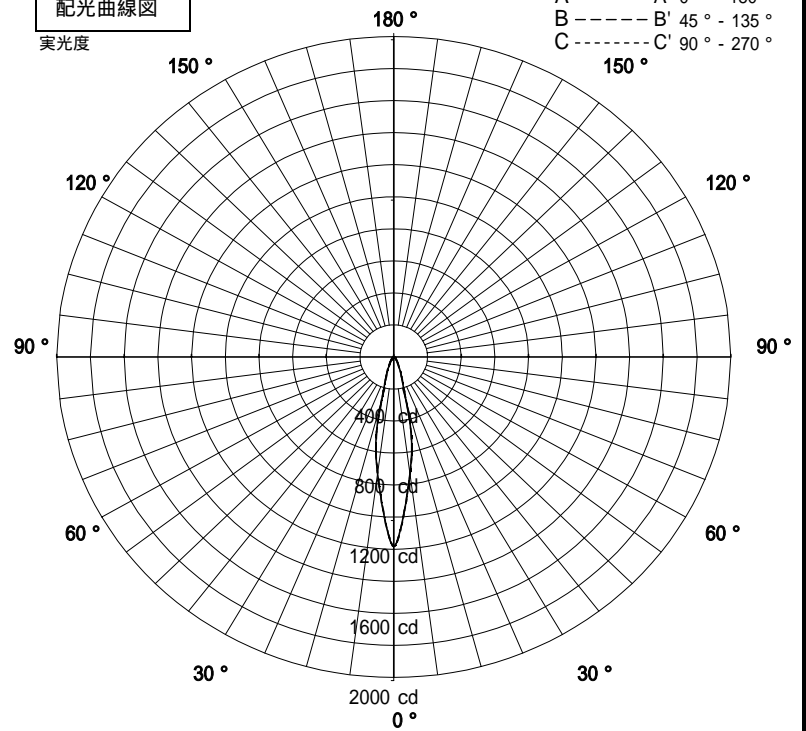


1/2照度角

直射水平面照度

単位:Lx

器具効率	90.1	%
上方効率	0.0	%
下方効率	90.1	%
保守率	良	1
	中	1
	否	1
1/2照度角		
A - A'	20.0	H
C - C'	20.0	H
最大取付間隔		
A - A'	0.35	H
C - C'	0.35	H

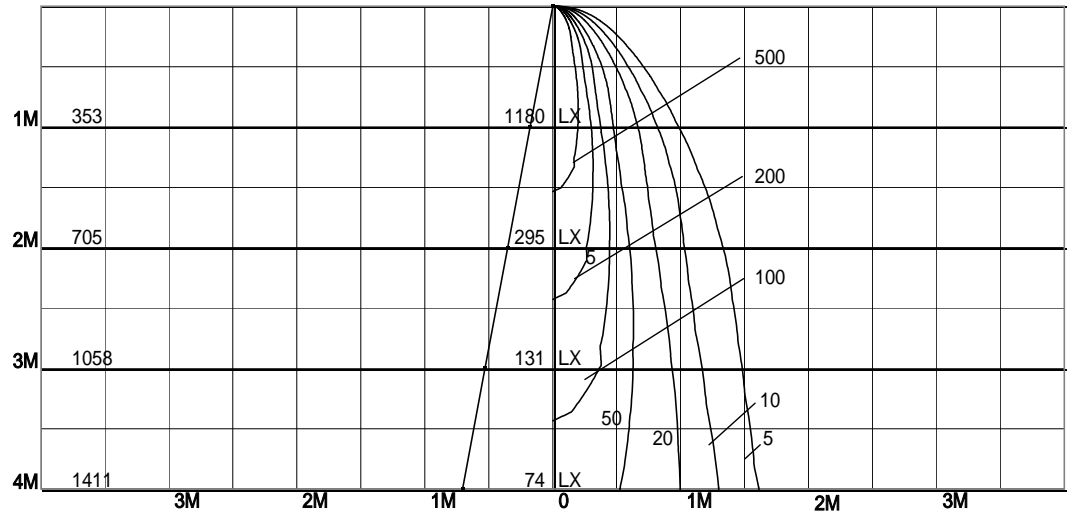

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%				10%				10%				10%				0%
床	10%																0%
0.60	65	60	57	54	65	60	56	54	64	59	56	54	63	59	56	54	53
0.80	70	65	61	59	69	64	61	59	68	64	61	58	67	63	60	58	57
1.00	73	69	66	63	73	68	65	63	71	68	65	63	70	67	64	62	61
1.25	76	72	69	67	75	72	69	67	74	71	68	66	72	70	68	66	65
1.50	78	75	72	70	77	74	72	69	76	73	71	69	74	72	70	68	67
2.00	81	78	76	74	80	78	76	74	79	77	75	73	77	75	74	73	71
2.50	83	81	79	78	82	80	79	77	80	79	77	76	79	78	76	75	74
3.00	84	82	81	80	83	82	80	79	82	80	79	78	80	79	78	77	76
4.00	85	84	83	82	84	83	82	81	83	82	81	80	81	81	80	79	78
5.00	86	85	84	83	85	84	84	83	83	83	82	82	82	81	81	80	79
7.00	87	86	86	85	86	85	85	85	84	84	83	83	83	82	82	82	80
10.00	87	87	87	86	86	86	86	86	85	85	84	84	83	83	83	83	81