


屋内照明器具特性




品名	DD-3362-W		
光源	LED 6.5W		
実効光束 (器具光束)	438lm	エネルギー 効率	67.4lm/W



配光曲線図

実光度

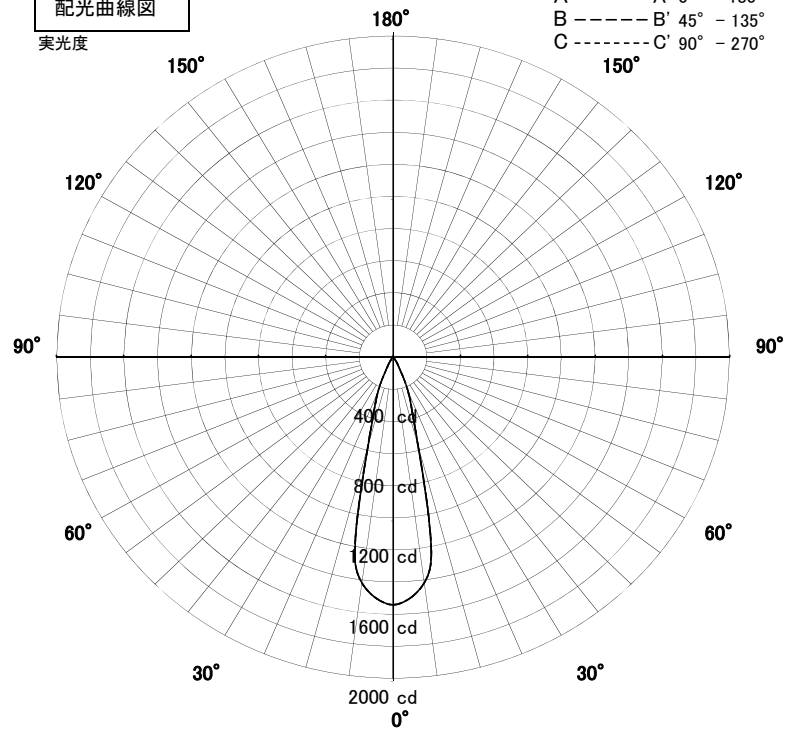


1/2照度角

直射水平面照度

単位:Lx

器具効率	89.4%	
色温度	4000K	
演色評価指数	Ra85	
保守率	良	0.69
	中	0.67
	否	0.63
1/2照度角		
A-A'	28.0	Deg
C-C'	28.0	Deg
最大取付間隔		
A-A'	0.50	H
C-C'	0.50	H

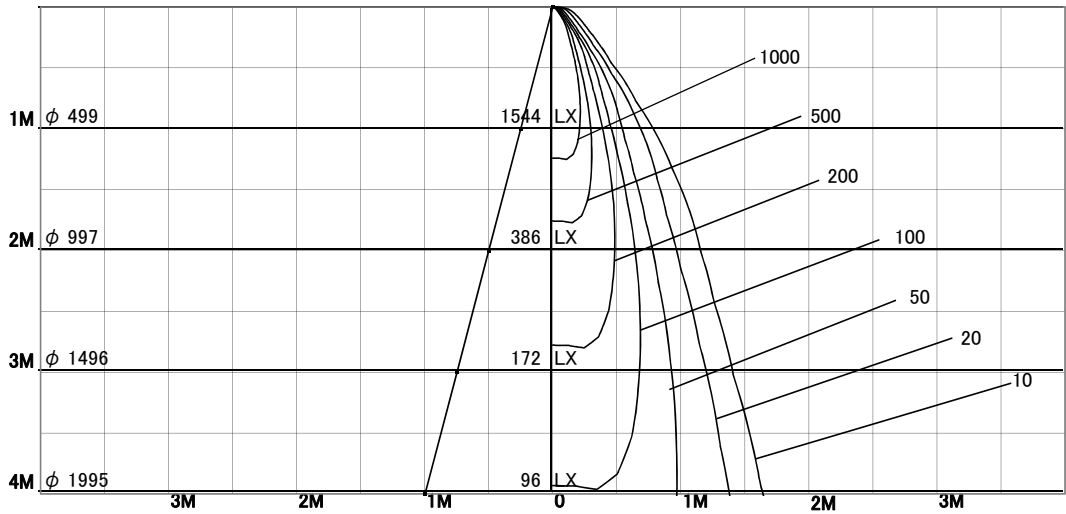

固有照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	90	84	81	78	90	84	80	78	88	83	80	78	87	83	80	77	76
0.80	95	90	86	83	94	89	86	83	93	88	85	83	91	87	85	82	81
1.00	100	95	91	88	99	94	91	88	97	93	90	88	95	92	89	87	86
1.25	103	98	95	93	102	98	95	92	100	96	94	92	98	95	93	91	90
1.50	105	101	98	96	104	100	98	95	102	99	97	95	100	98	96	94	92
2.00	108	105	103	101	107	105	102	101	105	103	101	100	103	102	100	99	97
2.50	110	108	106	105	109	107	106	104	107	106	104	103	105	104	103	102	100
3.00	112	110	109	107	111	109	108	107	109	108	106	106	107	106	105	104	102
4.00	113	112	111	110	112	111	110	109	110	109	108	108	108	107	107	106	104
5.00	114	113	112	112	113	112	111	111	111	110	110	109	109	108	108	108	105
7.00	114	114	114	114	113	113	113	113	111	111	111	111	109	109	109	109	107
10.00	115	115	115	115	114	114	114	114	112	112	112	112	110	110	110	110	107