


# 屋内照明器具特性




品名	DD-3364-W		
光源	LED 6.5W		
実効光束 (器具光束)	433lm	エネルギー 効率	66.6lm/W



配光曲線図

実光度

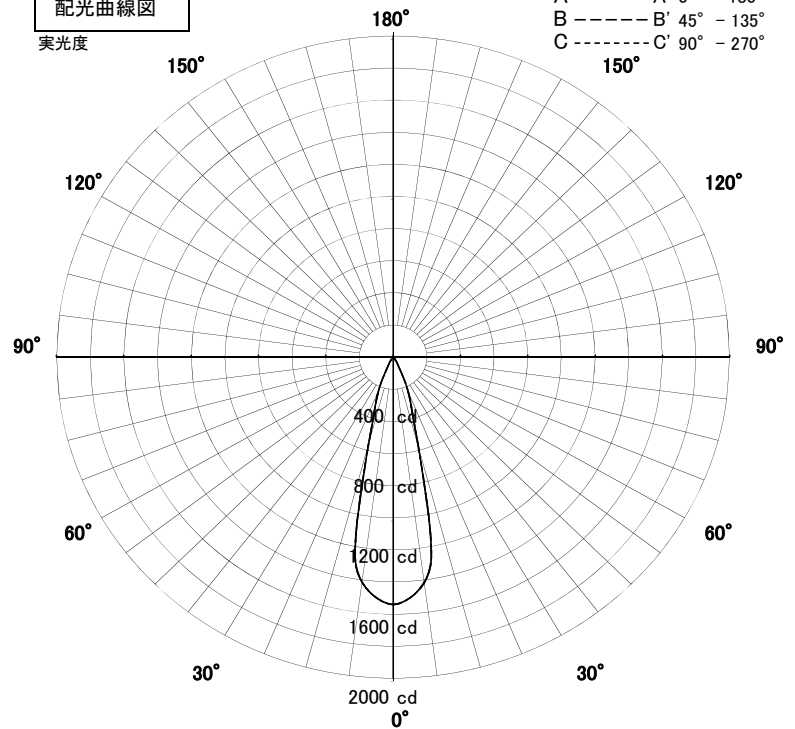


1/2照度角

直射水平面照度

単位:Lx

器具効率	88.3%	
色温度	4000K	
演色評価指数	Ra85	
保守率	良	0.67
	中	0.63
	否	0.56
1/2照度角		
A-A'	27.5	Deg
C-C'	27.5	Deg
最大取付間隔		
A-A'	0.49	H
C-C'	0.49	H

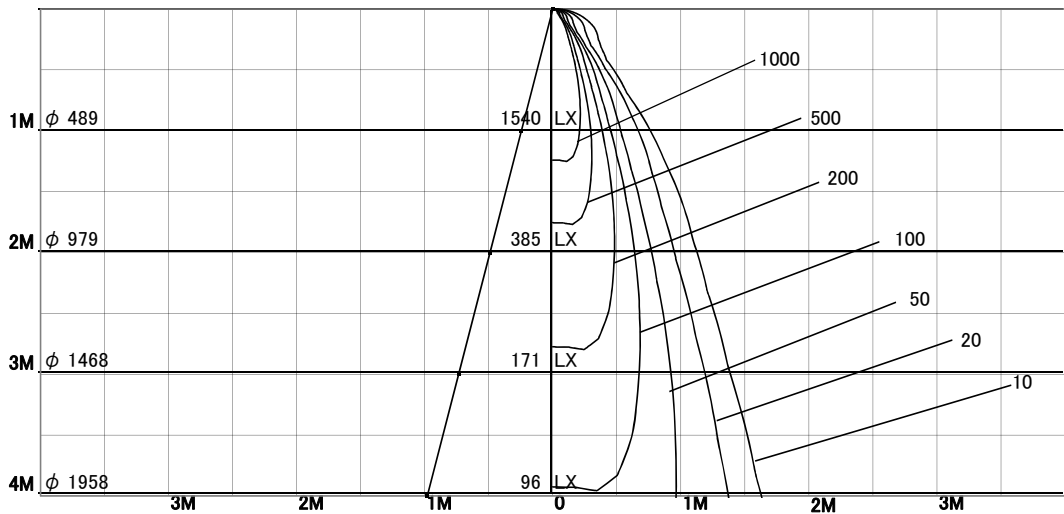

固有照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	90	84	80	77	89	84	80	77	88	83	80	77	87	82	79	77	76
0.80	95	89	85	82	94	89	85	82	93	88	85	82	91	87	84	82	81
1.00	99	94	90	88	98	94	90	88	97	93	89	87	95	92	89	87	85
1.25	102	98	95	92	101	97	94	92	100	96	93	91	98	95	93	91	89
1.50	105	101	98	95	104	100	97	95	102	99	96	94	100	97	95	93	92
2.00	108	105	103	101	107	104	102	100	105	103	101	99	103	101	100	98	97
2.50	110	108	106	104	109	107	105	104	107	105	104	103	105	104	103	102	100
3.00	111	110	108	107	110	109	108	106	108	107	106	105	107	106	105	104	102
4.00	113	112	111	110	112	111	110	109	110	109	108	108	108	107	107	106	104
5.00	113	113	112	111	112	112	111	110	110	110	109	109	108	108	108	107	105
7.00	114	114	114	113	113	113	113	112	111	111	111	111	109	109	109	109	106
10.00	115	115	115	115	114	114	114	114	112	112	112	112	110	110	110	110	107