


# 屋内照明器具特性




品名	PD-2615-L		
光源	LDA8L-G-K/60W×1		
実効光束 (器具光束)	740lm	効率	94.9lm/W



配光曲線図

実光度

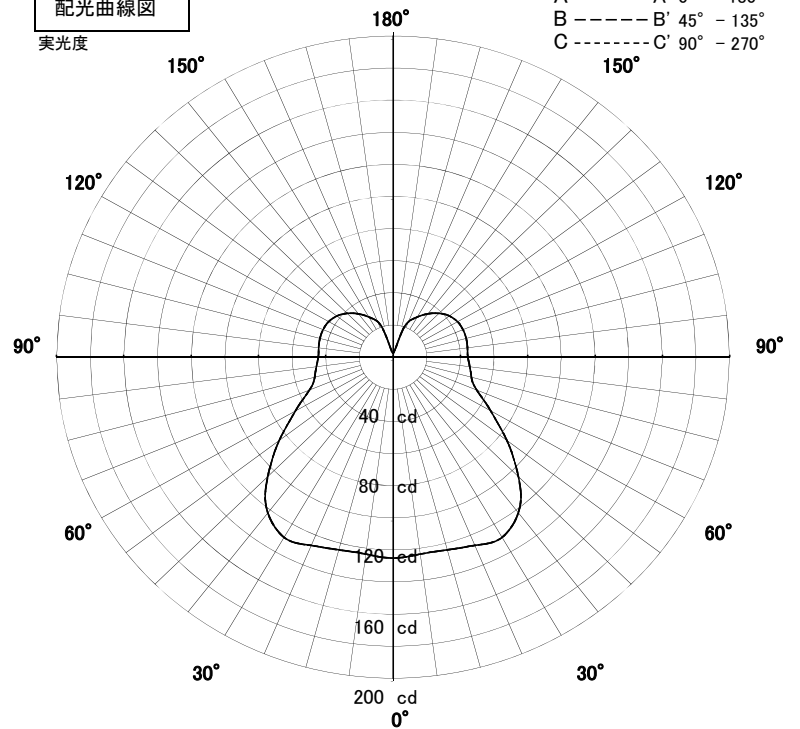


1/2照度角

直射水平面照度

単位:Lx

色温度	2700K	
演色評価指数	Ra80	
保守率	良	0.67
	中	0.63
	否	0.56

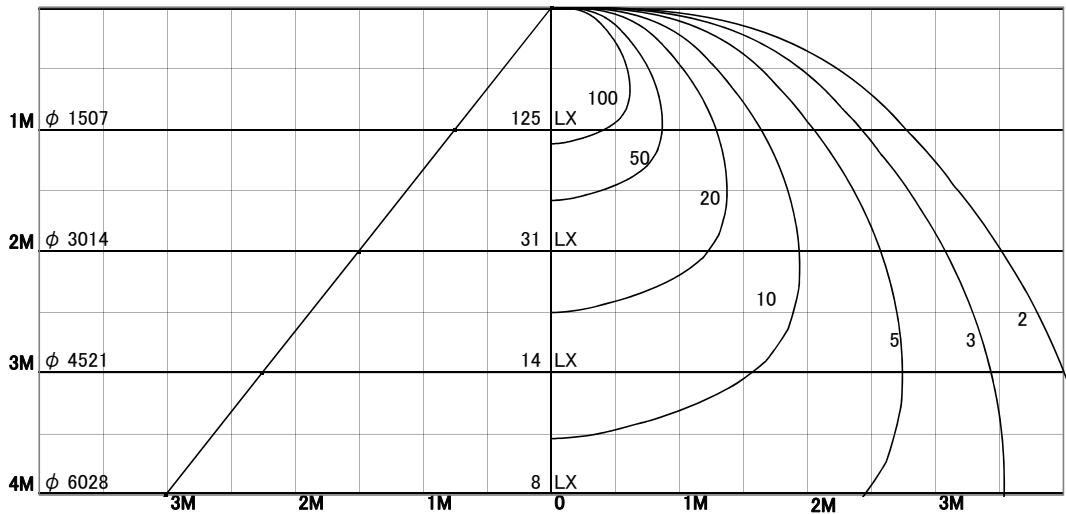

1/2照度角		
A-A'	74.0	Deg
C-C'	74.0	Deg
最大取付間隔		
A-A'	1.51	H
C-C'	1.51	H

照明率表

	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
天井	10%																0%
壁	10%																0%
床	10%																0%
0.60	37	28	23	19	36	28	22	19	34	27	22	19	33	26	22	18	17
0.80	42	34	28	24	41	33	28	24	39	32	28	24	38	32	27	24	22
1.00	47	39	33	29	46	38	33	29	44	37	32	28	42	36	32	28	26
1.25	51	43	38	33	50	43	37	33	47	41	37	33	45	40	36	33	31
1.50	54	47	41	37	52	46	41	37	50	45	40	36	48	43	39	36	34
2.00	58	52	47	43	56	51	46	43	54	49	45	42	52	48	44	42	40
2.50	60	55	51	47	59	54	50	47	57	53	49	46	55	51	48	45	43
3.00	62	57	53	50	61	56	53	49	59	55	52	49	56	53	51	48	46
4.00	64	60	57	54	63	59	56	53	61	58	55	53	59	56	54	52	50
5.00	66	62	59	56	64	61	59	56	62	60	57	55	60	58	56	54	52
7.00	67	65	62	60	66	64	62	59	64	62	60	58	62	61	59	57	55
10.00	69	67	65	63	68	66	64	62	66	64	63	61	64	63	61	60	58