


# 屋内照明器具特性




品名	PD-2665-L		
光源	LDA4L-G-E17/S/40W		
実効光束 (器具光束)	395lm	効率	94.0lm/W

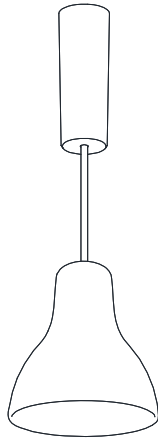

配光曲線図

実光度

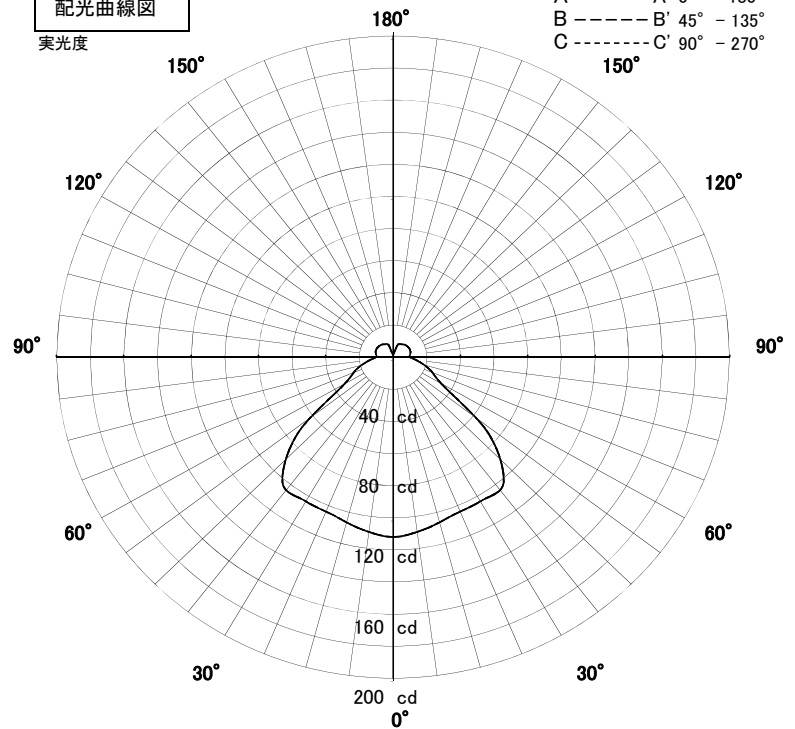


A ——— A' 0° - 180°  
 B - - - - B' 45° - 135°  
 C - - - - C' 90° - 270°

1/2照度角

直射水平面照度

単位:Lx

色温度	2700K	
演色評価指数	Ra83	
保守率	良	0.67
	中	0.63
	否	0.56

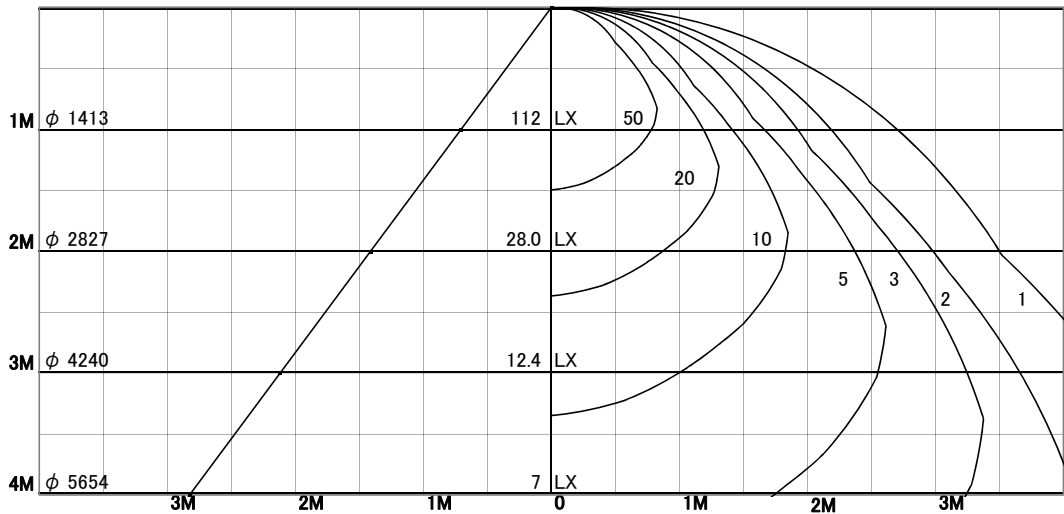

1/2照度角		
A-A'	70.5	Deg
C-C'	70.5	Deg
最大取付間隔		
A-A'	1.41	H
C-C'	1.41	H

照明率表

	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
天井	10%																0%
壁	10%																0%
床	10%																0%
0.60	49	39	33	28	48	39	33	28	46	38	32	28	44	37	32	28	26
0.80	57	47	41	36	56	47	41	36	53	46	40	36	51	45	40	36	34
1.00	63	54	47	43	61	53	47	43	59	52	46	42	57	51	46	42	40
1.25	68	60	54	49	66	59	53	49	64	57	52	48	61	56	52	48	46
1.50	71	64	58	54	70	63	58	54	67	62	57	53	65	60	56	53	51
2.00	76	70	65	61	75	69	65	61	72	67	64	60	70	66	63	60	58
2.50	79	74	70	66	78	73	69	66	75	71	68	65	73	70	67	64	62
3.00	81	76	73	69	80	76	72	69	77	74	71	68	75	72	69	67	65
4.00	83	80	76	74	82	79	76	73	80	77	74	72	77	75	73	71	69
5.00	85	82	79	76	83	81	78	76	81	79	76	74	79	77	75	73	71
7.00	86	84	82	80	85	83	81	79	83	81	79	78	81	79	78	76	74
10.00	87	86	84	82	86	85	83	82	84	83	81	80	82	81	80	79	76