


屋内照明器具特性



品名	DD-3534		
光源	LED15.3W(2700K)		
実効光束 (器具光束)	538lm	効率	34.0lm/W

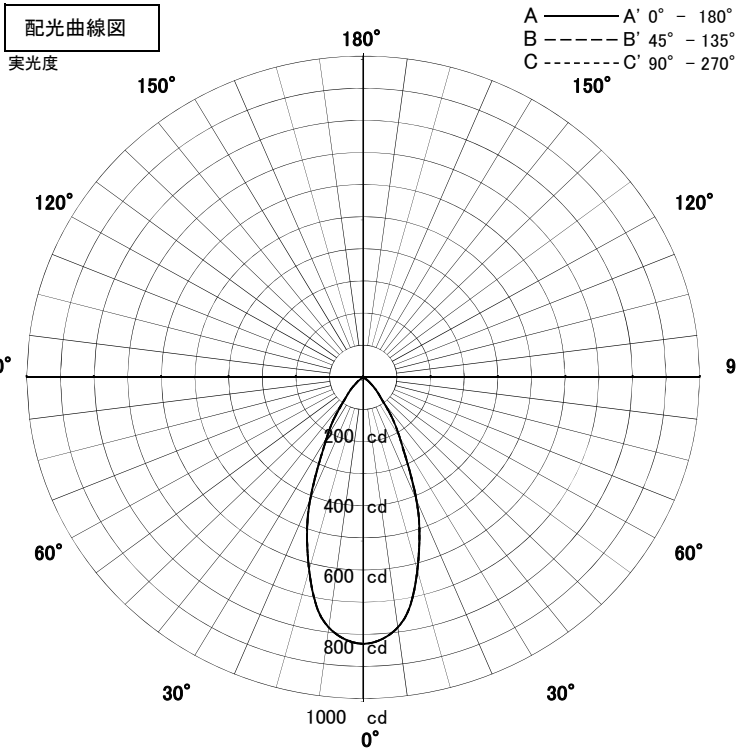

器具効率	57.6%	
色温度	2700K	
演色評価指数	Ra82	
保守率	良	0.67
	中	0.63
	否	0.56

1/2照度角		
A-A'	39.5	Deg
C-C'	39.5	Deg
最大取付間隔		
A-A'	0.72	H
C-C'	0.72	H


照 明 率 表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	41	37	35	34	40	37	35	34	40	37	35	34	39	37	35	33	33
0.80	44	41	38	37	43	40	38	37	43	40	38	37	42	40	38	37	36
1.00	46	43	41	40	46	43	41	40	45	43	41	40	44	42	41	39	39
1.25	48	46	44	42	48	45	44	42	47	45	43	42	46	44	43	42	41
1.50	49	47	46	44	49	47	45	44	48	46	45	44	47	46	44	43	43
2.00	51	50	48	47	51	49	48	47	50	48	47	47	49	48	47	46	45
2.50	52	51	50	49	52	51	50	49	51	50	49	48	50	49	48	48	47
3.00	53	52	51	50	52	52	51	50	51	51	50	50	50	50	49	49	48
4.00	54	53	52	52	53	52	52	51	52	52	51	51	51	51	50	50	49
5.00	54	53	53	52	53	53	52	52	52	52	52	51	51	51	51	51	49
7.00	54	54	54	53	54	54	53	53	53	53	52	52	52	52	51	51	50
10.00	55	54	54	54	54	54	54	54	53	53	53	53	52	52	52	52	50

1/2照度角

直射水平面照度



単位:Lx

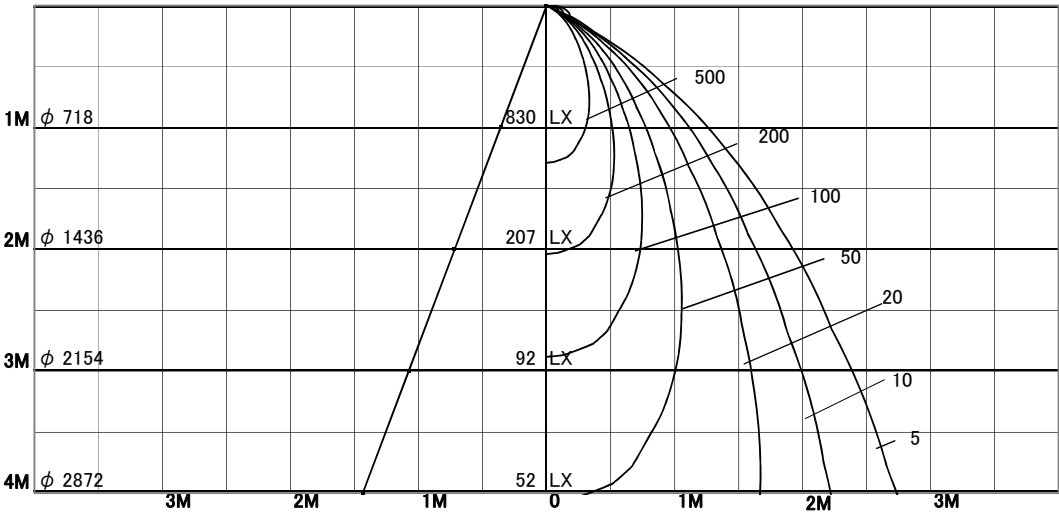

屋内照明器具特性



品名	DD-3534		
光源	LED15.3W(5000K)		
実効光束 (器具光束)	666lm	効率	43.2lm/W

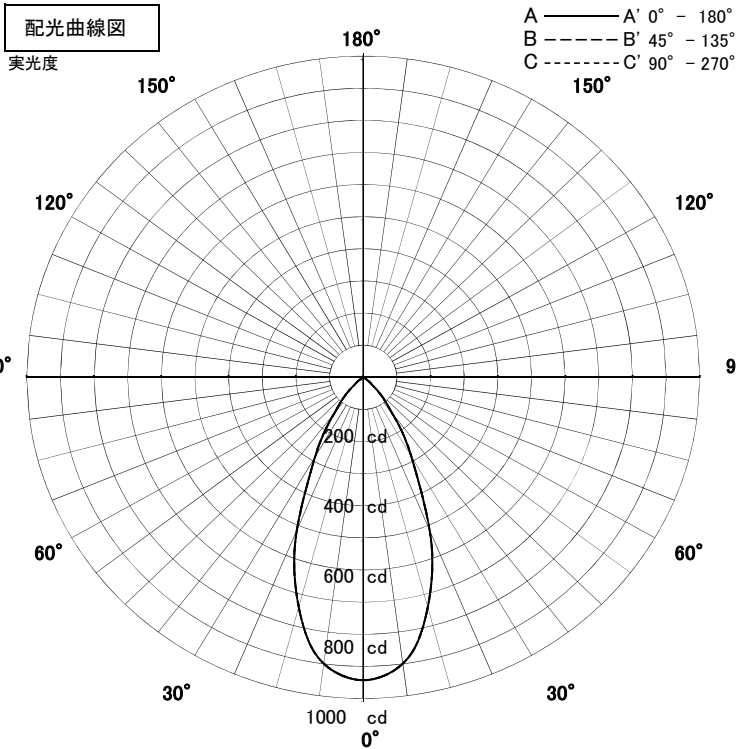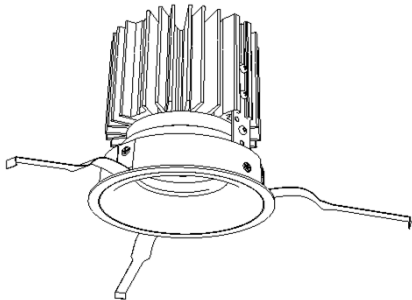


器具効率	59.8%	
色温度	5000K	
演色評価指数	Ra82	
保守率	良	0.67
	中	0.63
	否	0.56

1/2照度角		
A-A'	41.5	Deg
C-C'	41.5	Deg
最大取付間隔		
A-A'	0.76	H
C-C'	0.76	H

1/2照度角

直射水平面照度

単位:Lx

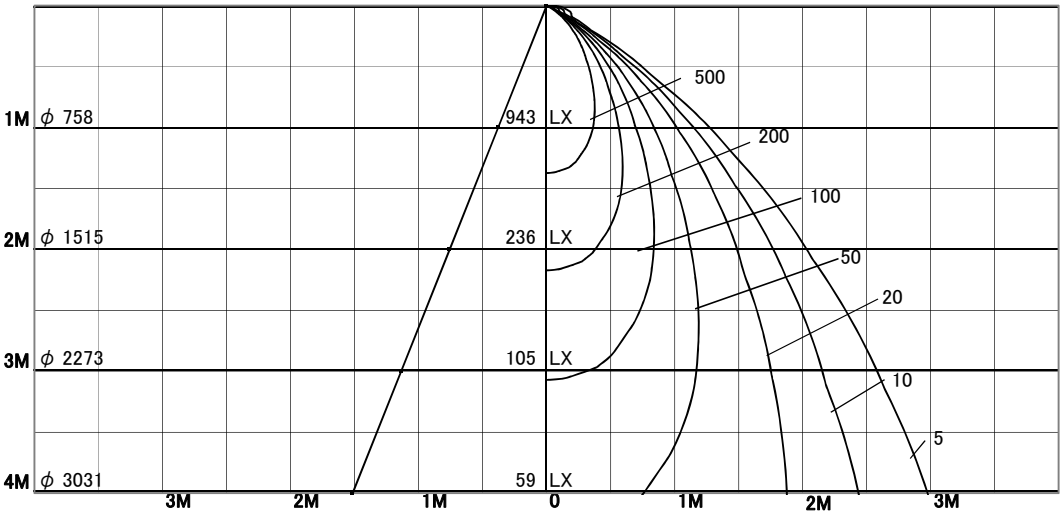

照 明 率 表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	43	39	37	35	43	39	37	35	42	39	37	35	41	38	37	35	35
0.80	46	43	40	39	46	43	40	39	45	42	40	39	44	42	40	38	38
1.00	49	46	44	42	48	45	43	42	47	45	43	42	46	44	43	41	41
1.25	51	48	46	45	50	48	46	44	49	47	45	44	48	46	45	44	43
1.50	52	50	48	47	51	49	48	46	50	49	47	46	49	48	47	46	45
2.00	54	52	51	50	53	52	50	49	52	51	50	49	51	50	49	48	48
2.50	55	54	53	52	54	53	52	51	53	52	52	51	52	52	51	50	49
3.00	56	55	54	53	55	54	53	53	54	53	53	52	53	52	52	51	50
4.00	56	56	55	54	56	55	55	54	55	54	54	53	54	53	53	53	51
5.00	57	56	56	55	56	56	55	55	55	55	54	54	54	54	53	53	52
7.00	57	57	57	56	57	56	56	56	56	55	55	55	55	54	54	54	53
10.00	57	57	57	57	57	57	57	56	56	56	56	55	55	55	55	54	53