



屋内照明器具特性



品名	DD-3569-LL		
光源	LED7.6W		
実効光束 (器具光束)	275lm	エネルギー 効率	37.7lm/W

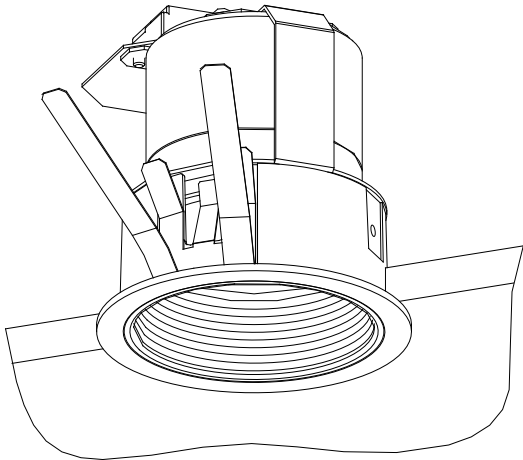

配光曲線図
実光度

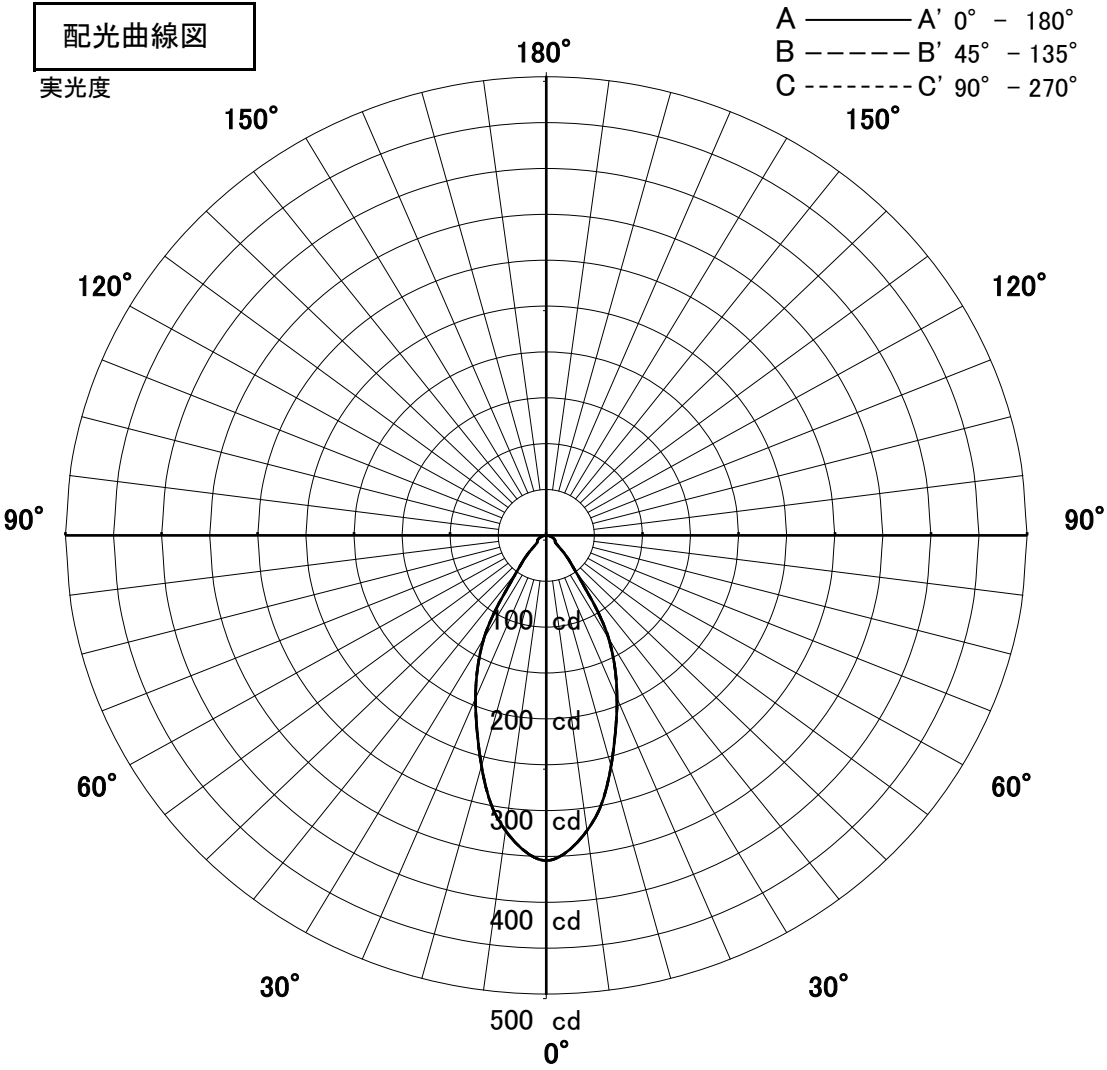


1/2照度角

直射水平面照度

単位：Lx

器具効率		56.3%
色温度		2700K
演色評価指数		Ra80
保守率	良	0.67
	中	0.63
	否	0.56
1/2照度角		
A-A'	40.0	Deg
C-C'	40.0	Deg
最大取付間隔		
A-A'	0.73	H
C-C'	0.73	H

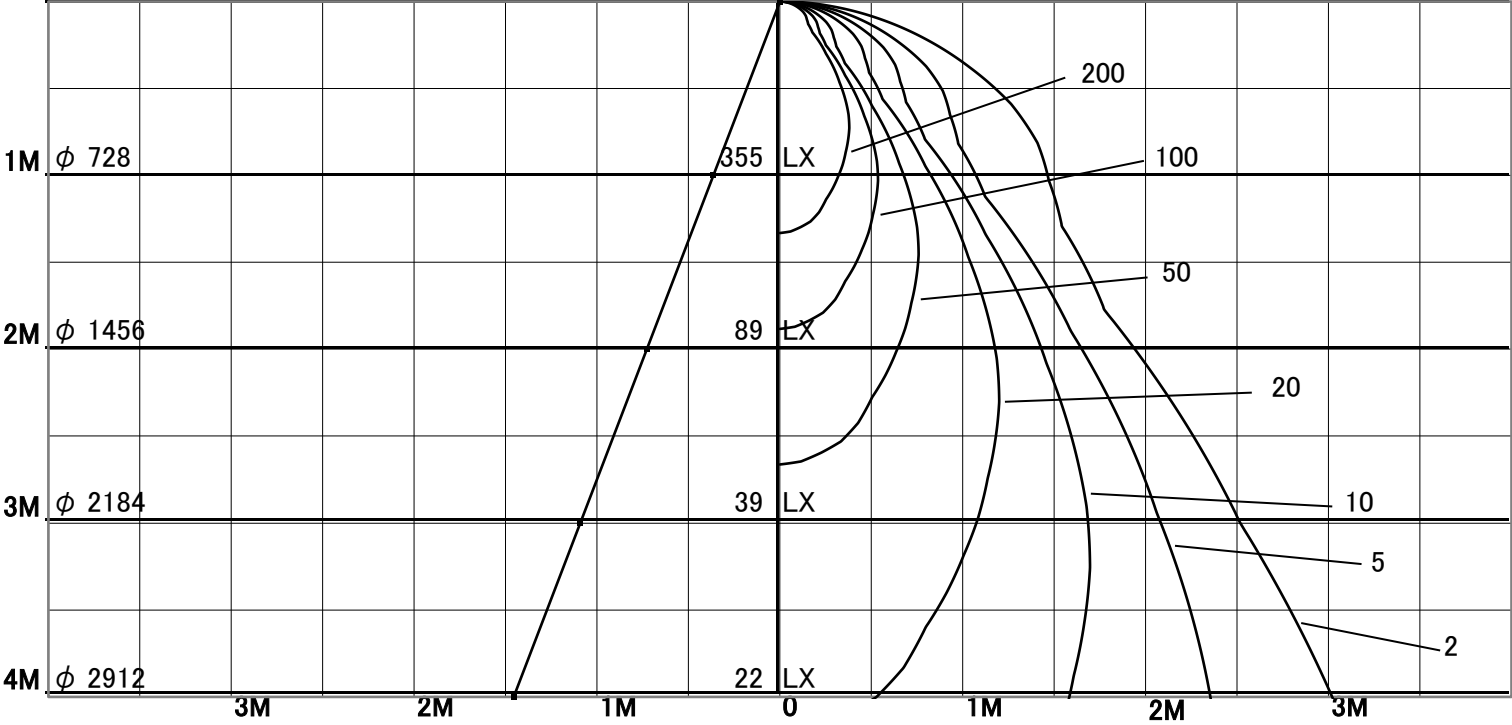

固有照明率表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	80	72	67	64	79	72	67	64	77	71	67	64	76	70	66	64	62
0.80	85	78	74	70	84	78	73	70	83	77	73	70	81	76	72	69	68
1.00	90	84	79	76	89	83	79	76	87	82	78	75	85	81	78	75	73
1.25	94	88	84	81	93	88	84	81	91	86	83	80	89	85	82	80	78
1.50	97	92	88	85	96	91	87	84	93	90	86	84	91	88	85	83	81
2.00	101	97	94	91	100	96	93	91	97	94	92	90	95	93	91	89	87
2.50	103	100	98	95	102	99	97	95	100	98	96	94	98	96	94	93	91
3.00	105	102	100	98	104	101	99	98	102	100	98	97	100	98	97	95	93
4.00	106	105	103	102	105	104	102	101	103	102	101	100	101	100	99	98	96
5.00	107	106	105	104	106	105	104	103	104	103	102	101	102	101	101	100	97
7.00	109	108	107	106	108	107	106	105	105	105	104	104	103	103	102	102	99
10.00	109	109	108	108	108	108	107	107	106	106	105	105	104	104	104	103	101