


屋内照明器具特性




品名	DD-3672-W		
光源	LED12.0W		
実効光束 (器具光束)	1,060 lm	効率	88.3 lm/W



配光曲線図

実光度

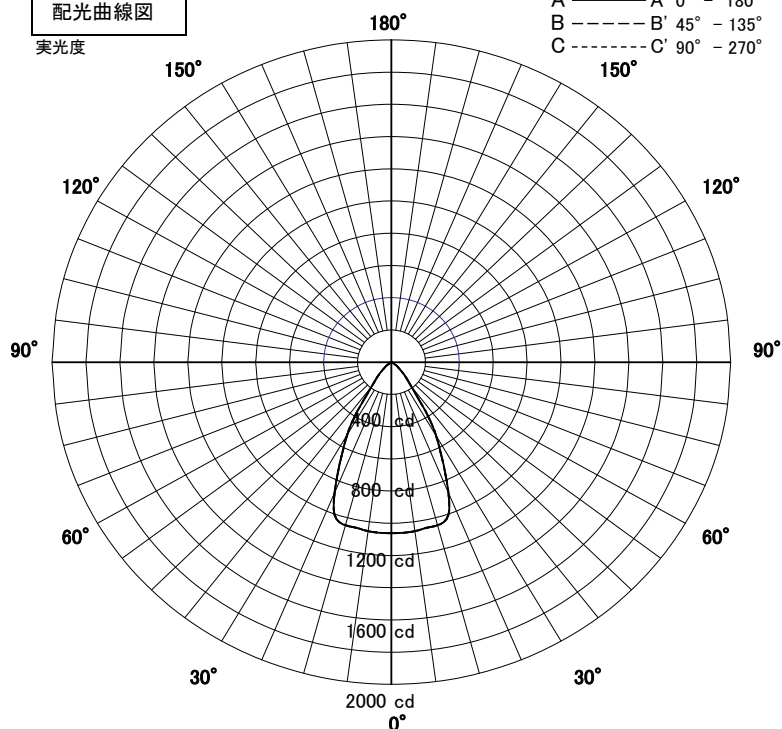


直射水平面照度

単位: Lx

A-A' Section

C-C' Section

色温度	4000K	
演色評価指数	Ra94	
保守率	良	0.67
	中	0.63
	否	0.56
1/2照度角		
A-A'	53.0	Deg
C-C'	53.0	Deg
最大取付間隔		
A-A'	1.00	H
C-C'	1.00	H

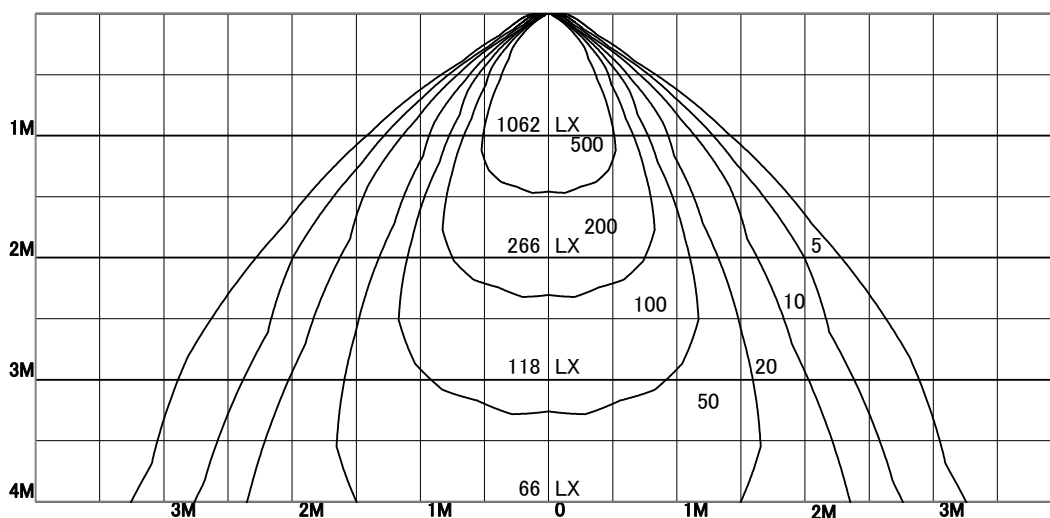

照 明 率 表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	70725	64828	61059	58443	70045	64509	60908	58379	68782	63898	60613	58251	67632	63320	60326	58125	57120
0.80	75821	70348	66610	63896	75026	69927	66386	63784	73549	69121	65948	63562	72204	68361	65524	63343	62212
1.00	79879	75067	71614	69016	79037	74576	71326	68853	77468	73639	70766	68531	76035	72754	70224	68213	67006
1.25	83029	78849	75708	73262	82148	78290	75351	73037	80501	77220	74654	72593	78989	76210	73983	72157	70850
1.50	85160	81493	78641	76359	84256	80882	78224	76077	82561	79711	77414	75521	80999	78606	76632	74976	73579
2.00	88282	85544	83308	81448	87379	84871	82802	81067	85674	83581	81820	80318	84094	82360	80874	79586	78060
2.50	90115	88004	86224	84702	89216	87291	85653	84242	87513	85921	84543	83340	85926	84622	83476	82460	80826
3.00	91340	89688	88263	87020	90446	88946	87642	86497	88750	87521	86436	85472	87164	86168	85276	84474	82751
4.00	92481	91291	90231	89281	91575	90498	89534	88666	89846	88974	88183	87464	88222	87524	86885	86297	84413
5.00	93118	92205	91376	90620	92201	91379	90628	89941	90447	89787	89178	88616	88794	88272	87786	87333	85332
7.00	93881	93323	92804	92320	92955	92457	91993	91558	91179	90788	90420	90074	89497	89195	88910	88639	86492
10.00	94342	94016	93707	93414	93402	93115	92842	92582	91593	91374	91165	90965	89875	89712	89556	89406	87125